

Coaxial Adapters, Within (Conform to IEEE-Std-287)



0.8mm	Up to 145 GHz
1 mm	Up to 110 GHz
1.85 mm	Up to 70 GHz
2.4 mm	Up to 50 GHz
2.92 mm	Up to 40 GHz
3.5 mm	Up to 26.5 GHz

Coaxial Adapters, Between (Conform to IEEE-Std-287)



1 mm/0.8 mm	Up to 110 GHz
1.35 mm/1 mm	Up to 90 GHz
1.85 mm/1 mm	Up to 70 GHz
2.4 mm/1.85 mm	Up to 50 GHz
2.92 mm/1.85 mm	Up to 40 GHz
2.92 mm/2.4 mm	Up to 40 GHz
3.5 mm/2.4 mm	Up to 26.5 GHz

Panel Adapters, Front Access, Within (Conform to IEEE-Std-287)



1.85 mm	Up to 65 GHz
2.92 mm	Up to 40 GHz

Panel Adapters, Within (Conform to IEEE-Std-287)



1.85 mm	Up to 65 GHz
2.92 mm	Up to 40 GHz

Hermetic Adapters, Within (Conform to IEEE-Std-287)



1.85mm/1.85mm	Up to 65GHz
2.92mm/2.92mm	Up to 40GHz

SMA Swept Adapters, Within (90 Degrees Angled-Swept)



Male/Female	Up to 24.6 GHz
-------------	----------------

Semirigid Cable Assemblies (Conform to IEEE-Std-287)



1 mm	Up to 110 GHz
1.85 mm	Up to 60/65 GHz
2.4 mm	Up to 50 GHz
2.92 mm	Up to 40 GHz

0.8 mm/0.8 mm DC - 145 GHz, Coaxial Adapters, In-Series

DESCRIPTION

"KPC080MF, FF, and MM"

are small size, low SWR, and low loss coaxial adapters. They are designed for ultra-broadband (up to sub-millimeter wave) measurement, instrument, and system applications.

SPECIFICATIONS

Electrical:


Frequency Range	DC - 145 GHz
SWR	< 1.6
Insertion Loss	1 dB (typ.)
Electrical Length	8.4 mm (Nominal)
Temperature Range	-55 to +125 °C

Mechanical:


Body and Outer Conductor	Gold Plated Stainless Steel
Inner Conductor	Gold Plated Beryllium Copper and Brass
Coupling Torque	45 N-cm (Nominal)
Connect/Disconnect Life	> 500 Cycles (Estimate)




TYPE: KPC080MF 0.8 mm Male/0.8 mm Female



TYPE: KPC080FF 0.8 mm Female/0.8 mm Female





TYPE: KPC080MM 0.8 mm Male/0.8 mm Male




Typical Performance

Number of samples: 4 pcs

KPC080MF (Insertable Calibration)

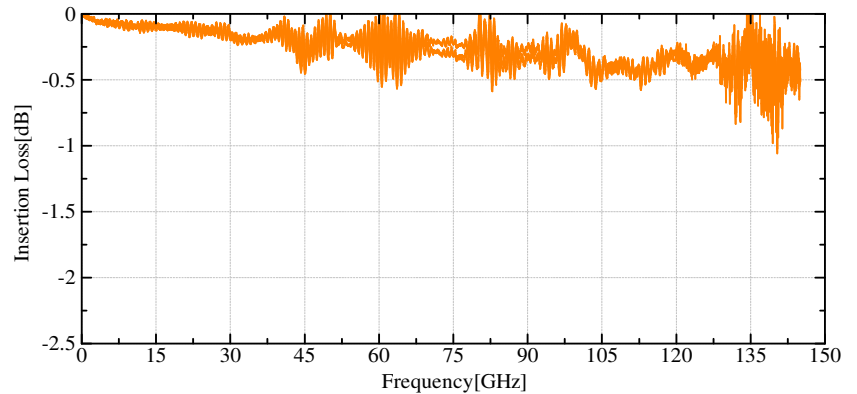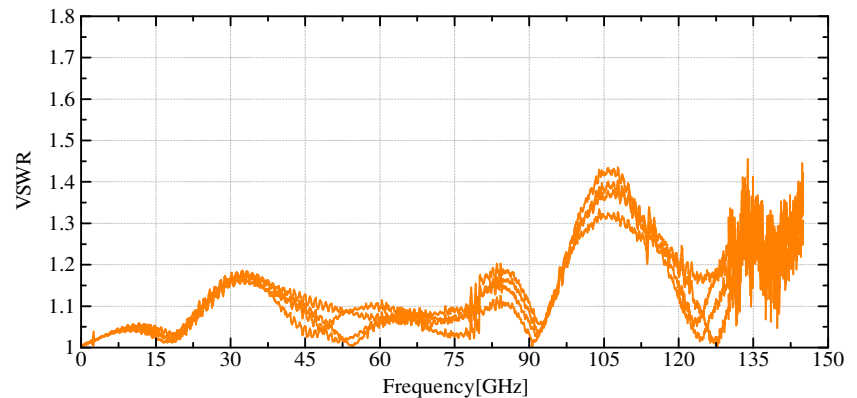

Interface Mating Dimensions of KPC080 (0.8 mm Connectors)

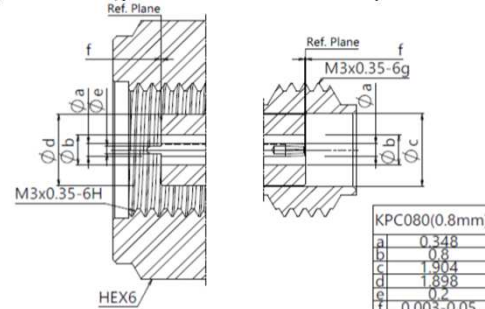

KPC080(0.8mm)	
a	0.348
b	0.8
c	1.904
d	1.898
e	0.2
f	0.003-0.05

NOTE:

All dimensions are in millimeters.

RoHS Compliant

REACH Compliant

Specifications Subject to Change Without Notice

Copyright(C) 2002-2024 Kawashima Manufacturing Co., Ltd. <All rights reserved.>

Rev. 01 Jun. 2024

1 mm/1 mm DC - 110 GHz, Coaxial Adapters, In-Series

DESCRIPTION

"KPC100MF, FF, and MM"

are small size, low SWR, and low loss coaxial adapters. They are designed for ultra-broadband (up to sub-millimeter wave) measurement, instrument, and system applications.

SPECIFICATIONS

Electrical:


Frequency Range	DC - 110 GHz
SWR	< 1.3 (*), < 1.5 (**)
Insertion Loss	0.5 dB (typ.)
Electrical Length	11.6 mm (Nominal)
Temperature Range	-55 to +125 °C

Mechanical:



Body and Outer Conductor	Gold Plated Stainless Steel
Inner Conductor	Gold Plated Beryllium Copper and Brass
Coupling Torque	45 N-cm (Nominal)
Connect/Disconnect Life	> 500 Cycles (Estimate)






TYPE: KPC100MF 1 mm Male/1 mm Female






Typical Performance

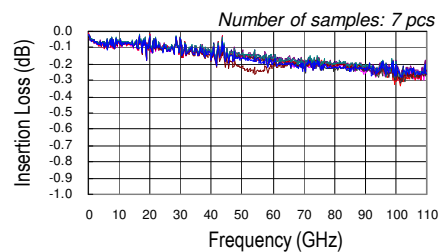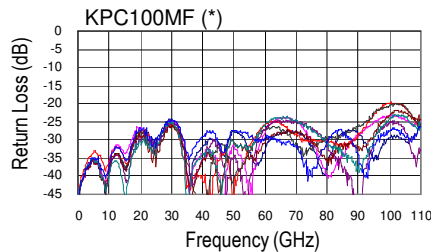


TYPE: KPC100FF 1 mm Female/1 mm Female

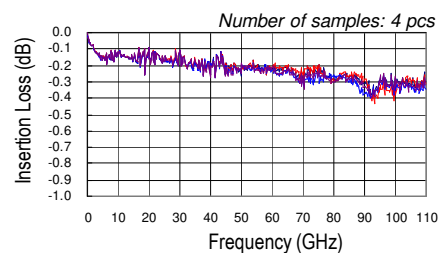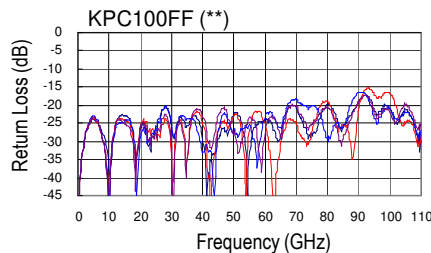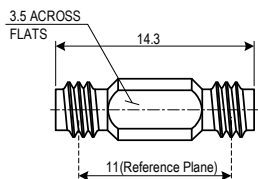

TYPE: KPC100MM 1 mm Male/1 mm Male

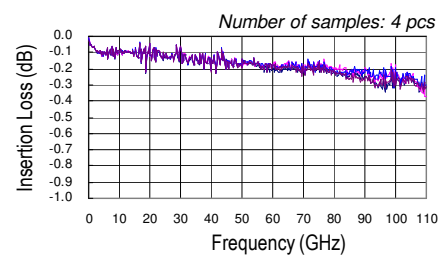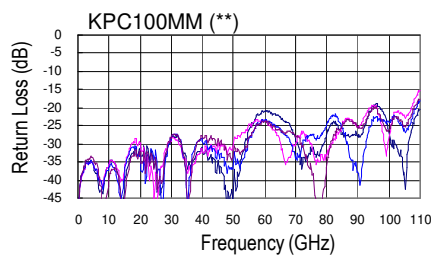

Interface Mating Dimensions of KPC100 (1 mm Connectors)

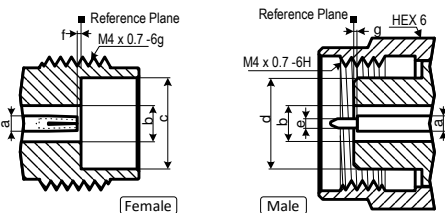

KPC100(1 mm)	
a	φ 0.434
b	φ 1.000
c	φ 2.390
d	φ 2.358
e	φ 0.250
f	0-0.013
g	0-0.013

NOTE:

All dimensions are in millimeters.

(*) Calibration as *insertable-device*

(**) Calibration as *non-insertable-device*

RoHS Compliant

REACH Compliant

Specifications Subject to Change Without Notice

Rev. 04 July 2020

Copyright(C) 2002-2021 Kawashima Manufacturing Co., Ltd. <All rights reserved.>

1.85 mm/1.85 mm DC - 70 GHz, Coaxial Adapters, In-Series

DESCRIPTION

"KPC185MF, FF, and MM"

are small size, low SWR, and low loss coaxial adapters. They are designed for broadband measurement, instrument, and system applications.

SPECIFICATIONS

Electrical:

Frequency Range
SWR

Insertion Loss

Electrical Length

Temperature Range

DC - 70 GHz

< 1.3

< 0.45 dB

17.5 mm (Nominal)

-55 to +125 °C

Mechanical:

Body and Outer Conductor

Inner Conductor

Coupling Torque

Connect/Disconnect Life

Passivated or Gold Plated Stainless Steel

Gold Plated Beryllium Copper and Brass

90 N-cm (Nominal)


> 1,000 Cycles



Production Status
2 Weeks Lead-Time
for Shipping


TYPE: KPC185MF

1.85 mm Male/1.85 mm Female
17.04(Reference Plane)

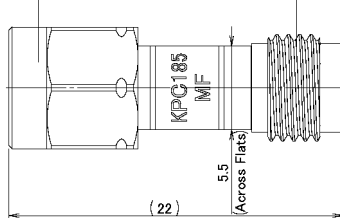


TYPE: KPC185FF

1.85 mm Female/1.85 mm Female
17.04(Reference Plane)

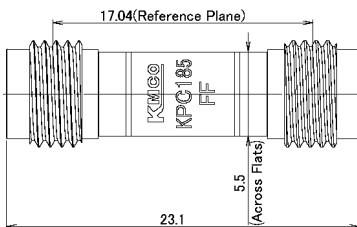


TYPE: KPC185MM


1.85 mm Male/1.85 mm Male
17.04(Reference Plane)

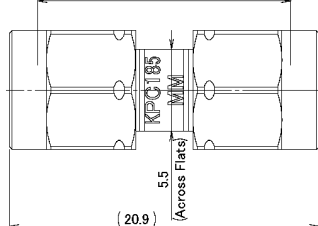

Typical Performance

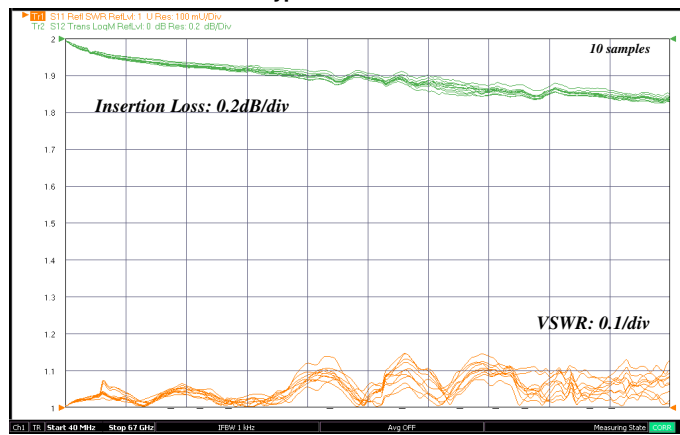

KPC185MF 0.04~70GHz

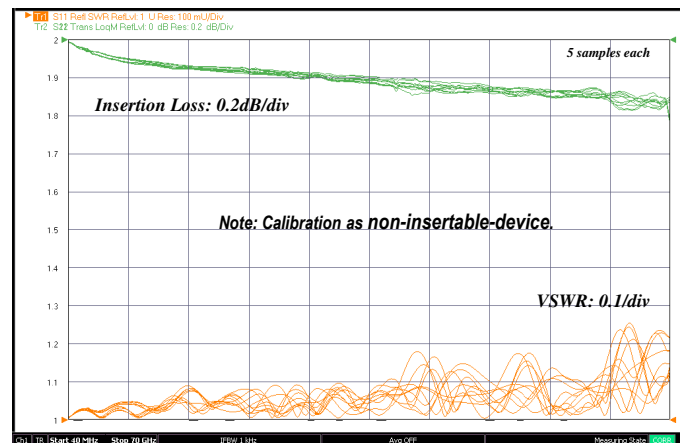


KPC185FF & KPC185MM 0.04~70GHz

Interface Mating Dimensions of KPC185 (1.85 mm Connectors <*>)

NOTE:

All dimensions are in millimeters.

KPC185(1.85 mm)	
a	φ 0.803
b	φ 1.850
c	φ 4.770
d	φ 4.750
e	φ 0.511
f	0-0.050
g	0-0.050

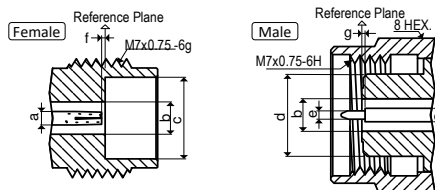

<*> Matable with 2.4 mm connectors

RoHS Compliant

REACH Compliant

Specifications Subject to Change Without Notice

Rev. 04 Feb. 2024

Copyright(C) 2002-2024 Kawashima Manufacturing Co., Ltd. <All rights reserved.>

KMCO Kawashima Manufacturing Co., Ltd.
ISO9001:14001 Certified

1-3-5 Higashi-ikuta, Tama-ku, Kawasaki 214-0031 JAPAN
TEL: +81-44-911-7073 FAX: +81-44-911-9621
https://kmco.co.jp/en/ e-mail: sales@kmco.co.jp

2.4 mm/2.4 mm DC - 50 GHz, Coaxial Adapters, In-Series

DESCRIPTION

"KPC240MF, FF, and MM"

are small size, low SWR, and low loss coaxial adapters. They are designed for broadband measurement, instrument, and system applications.

SPECIFICATIONS

Electrical:

Frequency Range	DC - 50 GHz
SWR	< 1.25
Insertion Loss	< 0.3 dB
Electrical Length	17.5 mm (Nominal)
Temperature Range	-55 to +125 °C

Mechanical:


Body and Outer Conductor	Passivated Stainless Steel
Inner Conductor	Gold Plated Beryllium Copper and Brass
Coupling Torque	90 N-cm (Nominal)
Connect/Disconnect Life	> 1,000 Cycles




Production Status
2 Weeks Lead-Time
for Shipping

Typical Performance


TYPE: KPC240MF 2.4 mm Male/2.4 mm Female

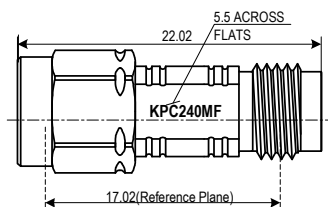




SWR

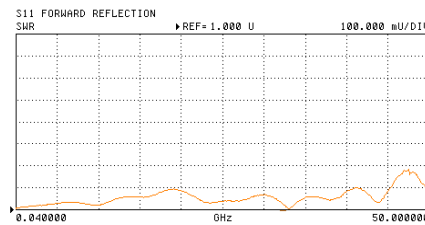




Insertion Loss

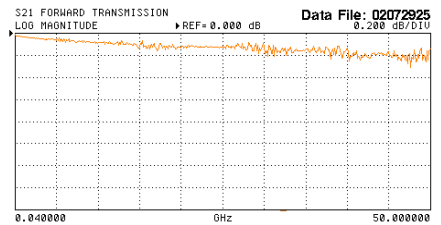

TYPE: KPC240FF 2.4 mm Female/2.4 mm Female

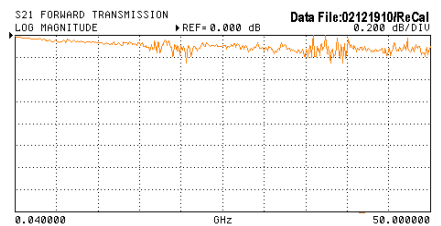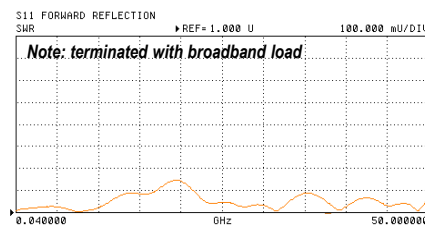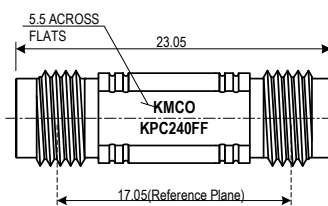


TYPE: KPC240MM 2.4 mm Male/2.4 mm Male

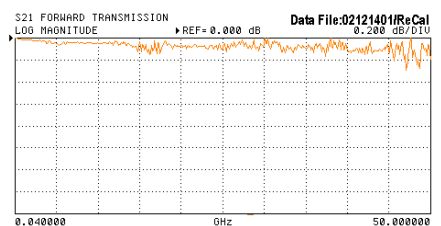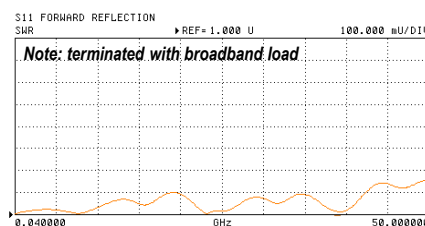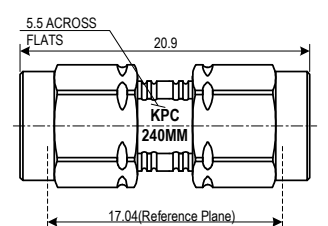

Interface Mating Dimensions of KPC240 (2.4 mm Connectors <*>)

NOTE:

All dimensions are in millimeters.

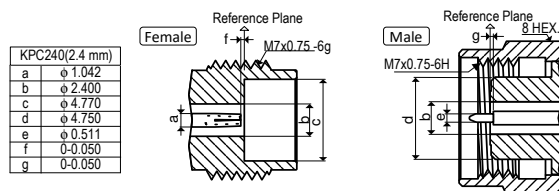

RoHS Compliant

REACH Compliant

<*> Matable with 1.85 mm connectors

Specifications Subject to Change Without Notice

Rev. 03 June 2017

Copyright(C) 2002-2021 Kawashima Manufacturing Co., Ltd. <All rights reserved.>

2.92 mm/2.92 mm DC - 40 GHz, Coaxial Adapters, In-Series

DESCRIPTION

"KPC292MF, FF, and MM"

are small size, low SWR, and low loss coaxial adapters. They are designed for broadband measurement, instrument, and system applications.

SPECIFICATIONS

Electrical:

Frequency Range	DC - 40 GHz
SWR	< 1.15 (MF&MM) < 1.20 (FF)
Insertion Loss	< 0.2 dB
Electrical Length	17.5 mm (Nominal)
Temperature Range	-55 to +125 °C

Mechanical:

Body and Outer Conductor	Passivated Stainless Steel
Inner Conductor	Gold Plated Beryllium Copper and Brass
Coupling Torque	90 N-cm (Nominal)
Connect/Disconnect Life	> 1,000 Cycles




Production Status
2 Weeks Lead-Time
for Shipping


Typical Performance

TYPE: KPC292MF


2.92 mm Male/2.92 mm Female

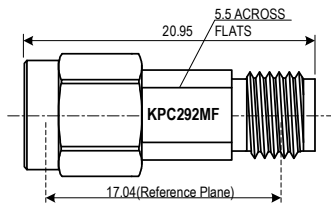

SWR



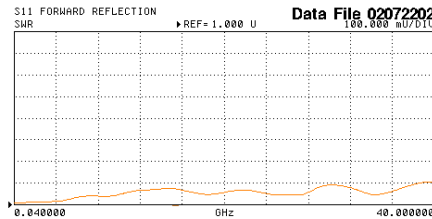


Insertion Loss

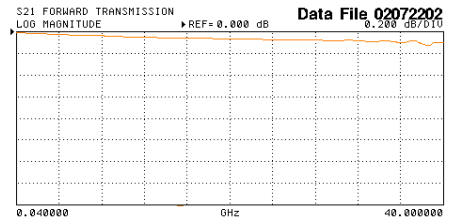




TYPE: KPC292FF

2.92 mm Female/2.92 mm Female

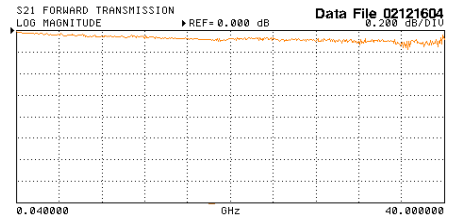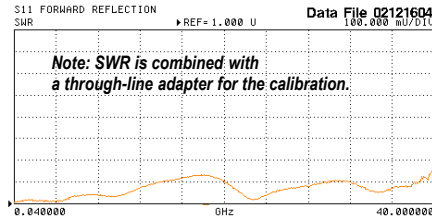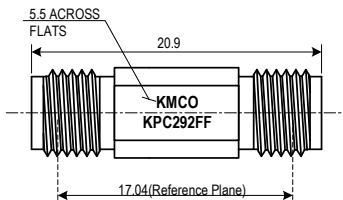

TYPE: KPC292MM

2.92 mm Male/2.92 mm Male

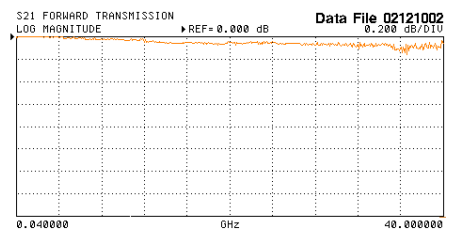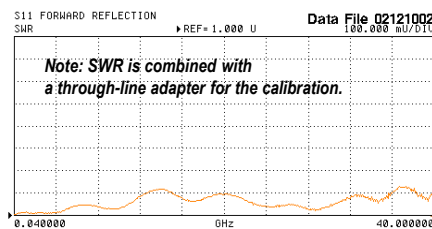
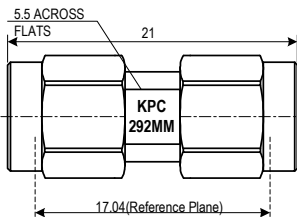


Interface Mating Dimensions of KPC292 (2.92 mm Connectors)

NOTE:

All dimensions are in millimeters.

KPC292(2.92 mm)	
a	φ 1.270
b	φ 2.920
c	φ 4.640
d	φ 4.580
e	φ 0.920
f	0-0.050
g	0-0.050



RoHS Compliant

REACH Compliant

Specifications Subject to Change Without Notice

Rev. 03 June 2017

Copyright(C) 2002-2021 Kawashima Manufacturing Co., Ltd. <All rights reserved.>

KMCO Kawashima Manufacturing Co., Ltd.
ISO9001:14001 Certified

1-3-5 Higashi-ikuta, Tama-ku,
Kawasaki 214-0031 JAPAN

TEL: +81-44-911-7073
https://kmco.co.jp/en/

FAX: +81-44-911-9621
e-mail: sales@kmco.co.jp

3.5 mm/3.5 mm DC - 26.5 GHz, Coaxial Adapters, In-Series

DESCRIPTION

"KPC350MF, FF, and MM"

are small size, low SWR, and low loss coaxial adapters. They are designed for broadband measurement, instrument, and system applications.

SPECIFICATIONS

Electrical:

Frequency Range	DC - 26.5 GHz (Modeling: 34 GHz)
SWR	< 1.15
Insertion Loss	< 0.2 dB
Electrical Length	17.5 mm (Nominal)
Temperature Range	-55 to +125 °C

Mechanical:


Body and Outer Conductor	Passivated Stainless Steel
Inner Conductor	Gold Plated Beryllium Copper and Brass
Coupling Torque	90 N-cm (Nominal)
Connect/Disconnect Life	> 1,000 Cycles




Production Status
2 Weeks Lead-Time
for Shipping

Typical Performance


TYPE: KPC350MF 3.5 mm Male/3.5 mm Female

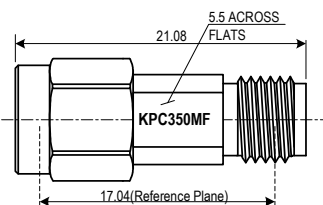

SWR



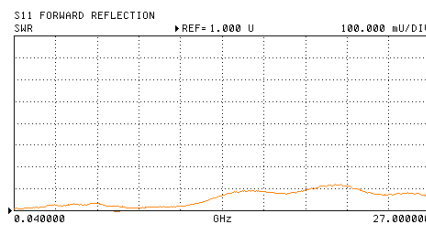


Insertion Loss

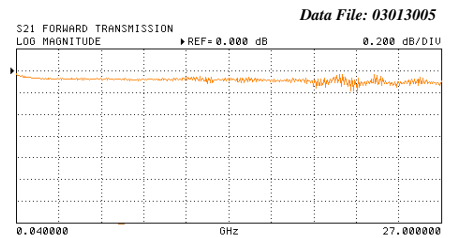




Data File: 03013005

TYPE: KPC350FF 3.5 mm Female/3.5 mm Female

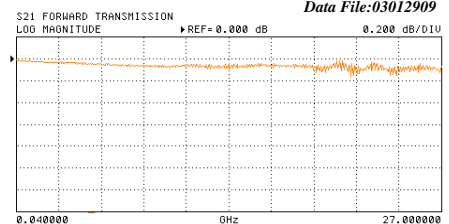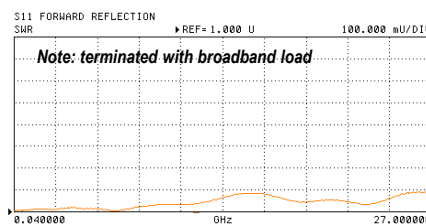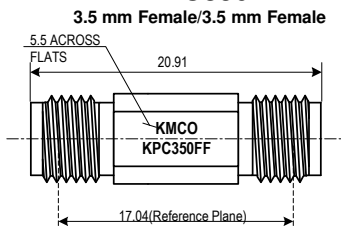

Data File: 03012909

TYPE: KPC350MM 3.5 mm Male/3.5 mm Male

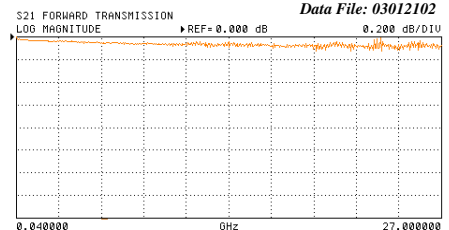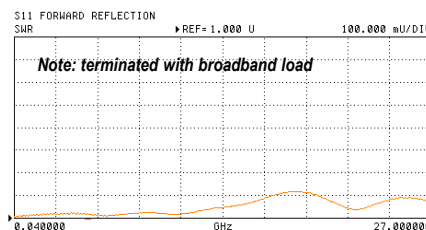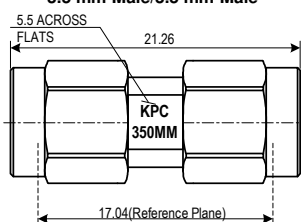


Data File: 03012102

Interface Mating Dimensions of KPC350 (3.5 mm Connectors <*>)

NOTE:

All dimensions are in millimeters.

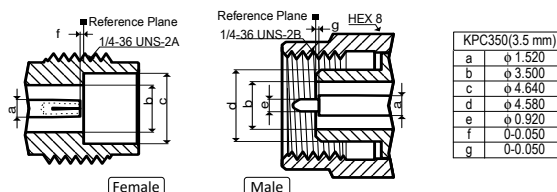

RoHS Compliant

REACH Compliant

<*> Matable with 2.92 mm connectors and SMA

Specifications Subject to Change Without Notice

Rev. 03 June 2017

Copyright(C) 2002-2021 Kawashima Manufacturing Co., Ltd. <All rights reserved.>

KMCO
Kawashima Manufacturing Co., Ltd.
ISO9001:14001 Certified

1-3-5 Higashi-ikuta, Tama-ku,
Kawasaki 214-0031 JAPAN

TEL: +81-44-911-7073
https://kmco.co.jp/en/

FAX: +81-44-911-9621
e-mail: sales@kmco.co.jp

1 mm/0.8 mm DC - 110 GHz, Coaxial Adapters, Between-Series

DESCRIPTION

"KPC100F080F, KPC100F080M, KPC100M080F, and KPC100M080M"

coaxial adapters between 1.00 mm and 0.80 mm are small size, low SWR, and low loss.

They are designed for broadband measurement, instrument, and system applications.

SPECIFICATIONS

Electrical:


Frequency Range	DC - 110 GHz
SWR	< 2.0 ⁽¹⁾
Insertion Loss	1.4 dB (typ.) ⁽¹⁾
Electrical Length	8.7 mm (Nominal)
Temperature Range	-55 to +125 °C

Mechanical:


Body and Outer Conductor	Gold Plated Stainless Steel
Inner Conductor	Gold Plated Beryllium Copper and Brass
Coupling Torque	45 N-cm (Nominal)
Connect/Disconnect Life	> 500 Cycles (Estimate)




TYPE: KPC100F080F 1 mm Female/0.8 mm Female

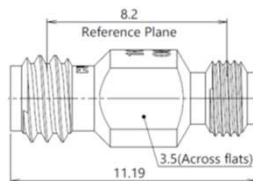


TYPE: KPC100F080M 1 mm Female/0.8 mm Male

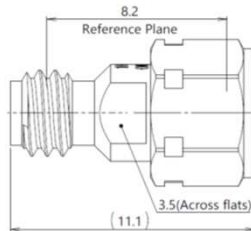

TYPE: KPC100M080F 1 mm Male/0.8 mm Female

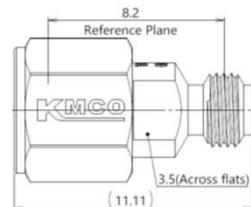


TYPE: KPC100M080M 1 mm Male/0.8 mm Male

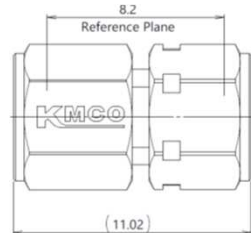

RoHS Compliant


REACH Compliant

Performance test configuration

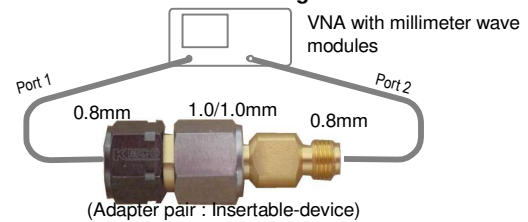


Typical Performance

(Number of adapter-pair samples: 3 pcs) KPC100F080F + KPC100M080M

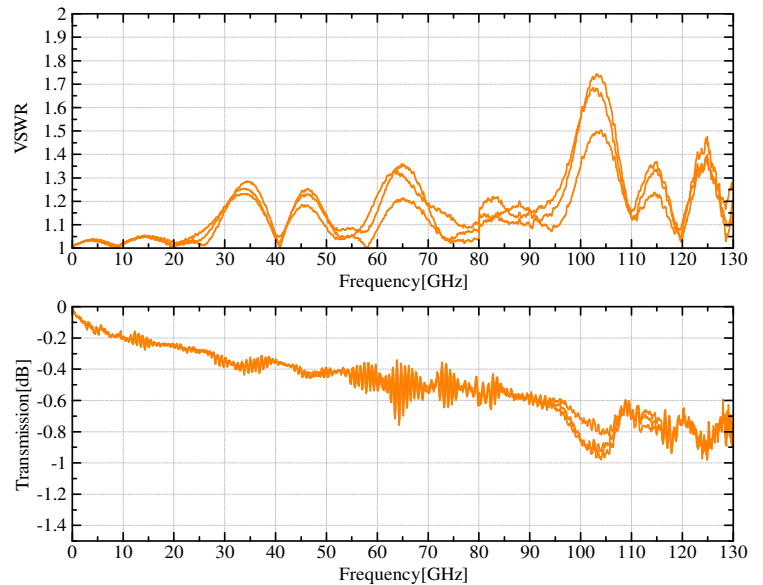


Interface Mating Dimensions

KPC100 (1 mm Connectors)

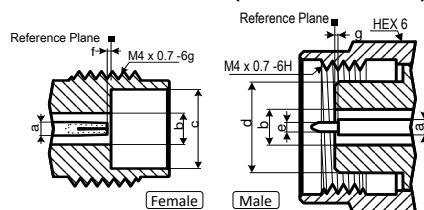

KPC100(1 mm)	
a	φ 0.434
b	φ 1.000
c	φ 2.390
d	φ 2.358
e	φ 0.250
f	0-0.013
g	0-0.013

KPC080 (0.8 mm Connectors)

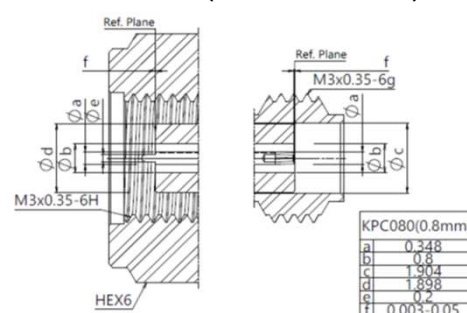

KPC080(0.8mm)	
a	0.348
b	0.8
c	1.904
d	1.898
e	0.2
f	0.003-0.05

NOTE:

All dimensions are in millimeters.

(1) 0.8 mm ports were measured for the measurement of return and insertion loss of the adapters with 1 mm ports mated as an interface, so these are shown as 2 adapters combined values.

Specifications Subject to Change Without Notice

Rev. 01 Jun. 2024

Copyright(C) 2002-2024 Kawashima Manufacturing Co., Ltd. <All rights reserved.>



Kawashima Manufacturing Co., Ltd.

1-3-5 Higashi-ikuta, Tama-ku,
Kawasaki 214-0031 JAPAN

TEL: +81-44-911-7073
https://kmco.co.jp/en/

FAX: +81-44-911-9621
e-mail: sales@kmco.co.jp

1.35 mm/1 mm DC - 90 GHz, Coaxial Adapters, Between-Series

DESCRIPTION

"KPC135F100F, KPC135F100M, KPC135M100F, and KPC135M100M"

coaxial adapters between 1.35 mm and 1.00 mm are small size, low SWR, and low loss.

They are designed for broadband measurement, instrument, and system applications.

SPECIFICATIONS

Electrical:


Frequency Range	DC - 90 GHz
SWR	< 1.4 ⁽¹⁾
Insertion Loss	1 dB (typ.) ⁽¹⁾
Electrical Length	11.6 mm (Nominal)
Temperature Range	-55 to +125 °C

Mechanical:


Body and Outer Conductor	Gold Plated Stainless Steel
Inner Conductor	Gold Plated Beryllium Copper and Brass
Coupling Torque	90 N-cm for KPC135 (Nominal) 45 N-cm for KPC100 (Nominal)
Connect/Disconnect Life	> 500 Cycles (Estimate)




TYPE: KPC135F100F
1.35 mm Female/1 mm Female




TYPE: KPC135F100M
1.35 mm Female/1 mm Male



TYPE: KPC135M100F
1.35 mm Male/1 mm Female

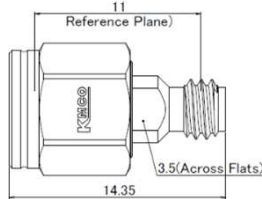


TYPE: KPC135M100M
1.35 mm Male/1 mm Male



RoHS Compliant



REACH Compliant

Performance Test Configuration

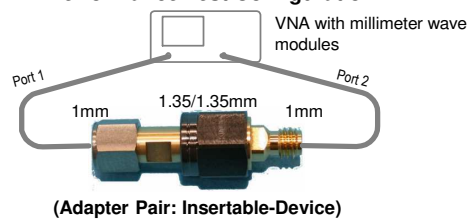


Typical Performance

(Number of adapter-pair samples: 5 pcs)

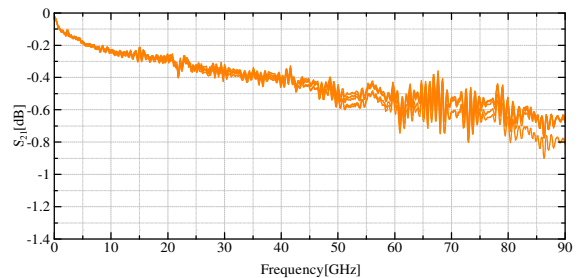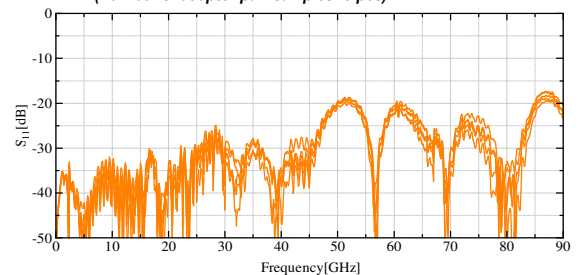


Interface Mating Dimensions

KPC135 (1.35 mm Connectors)

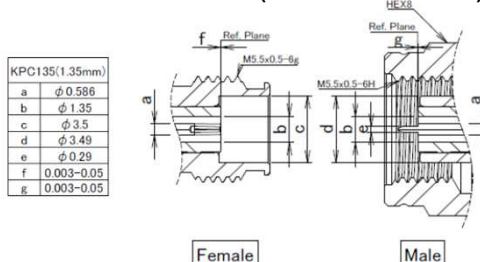

KPC100 (1 mm Connectors)

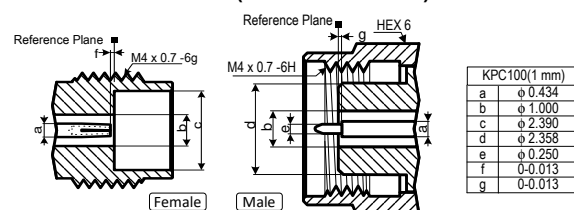

NOTE:

All dimensions are in millimeters.

(1) 1 mm ports were measured for the measurement of return and insertion loss of the adapters with 1.35 mm ports mated as an interface.

Specifications Subject to Change Without Notice

Rev. 01 August 2021

Copyright(C) 2002-2021 Kawashima Manufacturing Co., Ltd. <All rights reserved.>



Kawashima Manufacturing Co., Ltd.

1-3-5 Higashi-ikuta, Tama-ku,
Kawasaki 214-0031 JAPAN

TEL: +81-44-911-7073
https://kmco.co.jp/en/

FAX: +81-44-911-9621
e-mail: sales@kmco.co.jp

1.85 mm/1 mm DC - 70 GHz, Coaxial Adapters, Between-Series

DESCRIPTION

"KPC185F100F, KPC185F100M, KPC185M100F, and KPC185M100M"

coaxial adapters between 1.85 mm and 1.00 mm are small size, low SWR, and low loss.

They are designed for broadband measurement, instrument, and system applications.

SPECIFICATIONS

Electrical:


Frequency Range	DC - 70 GHz ⁽¹⁾
SWR	< 1.4
Insertion Loss	0.8 dB (typ.) ⁽²⁾
Electrical Length	14.6 mm (Nominal)
Temperature Range	-55 to +125 °C

Mechanical:


Body and Outer Conductor	Gold Plated Stainless Steel
Inner Conductor	Gold Plated Beryllium Copper and Brass
Coupling Torque	90 N-cm for KPC185 (Nominal) 45 N-cm for KPC100 (Nominal)
Connect/Disconnect Life	> 500 Cycles (Estimate)




TYPE: KPC185F100F
1.85 mm Female/1 mm Female

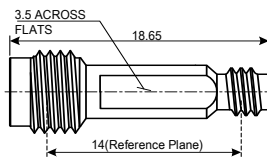


TYPE: KPC185F100M
1.85 mm Female/1 mm Male

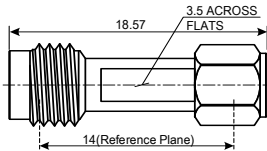


TYPE: KPC185M100F
1.85 mm Male/1 mm Female

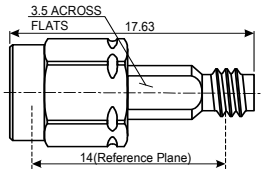

TYPE: KPC185M100M
1.85 mm Male/1 mm Male

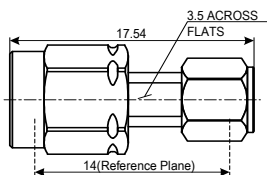


Performance Test Configuration

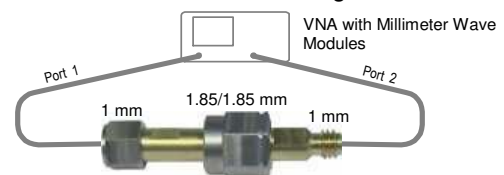

(Adapter Pair: Insertable-Device)

Typical Performance (Measured up to 72 GHz)

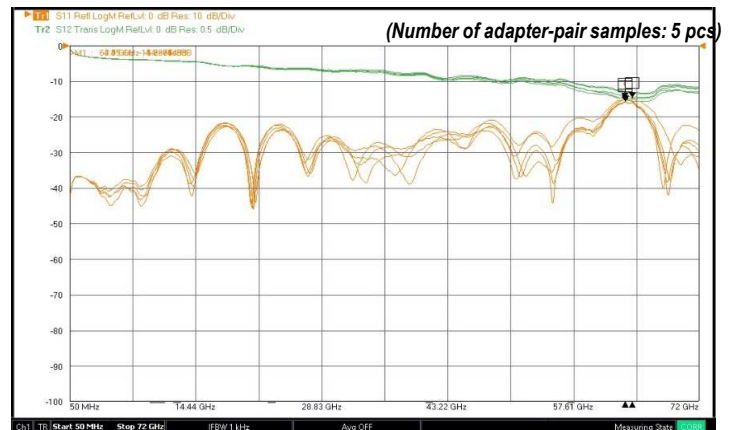


Return (orange line): 10dB/div
Transmission (green line): 0.5dB/div

RoHS Compliant


REACH Compliant

Interface Mating Dimensions

KPC185 (1.85 mm Connectors)

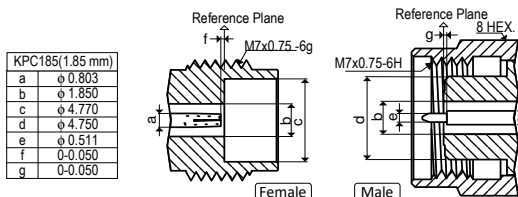

KPC100 (1 mm Connectors)

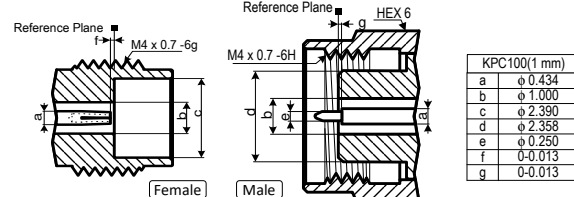

NOTE:

All dimensions are in millimeters.

(1) Usable upper limit frequency may be 72 GHz, however depends on a counterpart connector.

(2) 1 mm ports were measured for the measurement of return and insertion loss of the adapters with 1.85 mm ports mated as an interface.

Specifications Subject to Change Without Notice

Rev. 05 Jun. 2024

Copyright(C) 2002-2024 Kawashima Manufacturing Co., Ltd. <All rights reserved.>



Kawashima Manufacturing Co., Ltd.

1-3-5 Higashi-ikuta, Tama-ku,
Kawasaki 214-0031 JAPAN

TEL: +81-44-911-7073
https://kmco.co.jp/en/

FAX: +81-44-911-9621
e-mail: sales@kmco.co.jp

2.4 mm/1.85 mm DC - 50 GHz, Coaxial Adapters, Between-Series

DESCRIPTION

"KPC240F185F, KPC240F185M, KPC240M185F, and KPC240M185M"

coaxial adapters between 2.4 mm and 1.85 mm are small size, low SWR, and low loss.

They are designed for broadband measurement, instrument, and system applications.

SPECIFICATIONS

Electrical:

Frequency Range	DC - 50 GHz
SWR	< 1.25 (*)
Insertion Loss	< 0.4 dB (**)
Electrical Length	17.5 mm (Nominal)
Temperature Range	-55 to +125 °C


Mechanical:

Body and Outer Conductor	Passivated Stainless Steel
Inner Conductor	Gold Plated Beryllium Copper and Brass
Coupling Torque	90 N-cm (Nominal)
Connect/Disconnect Life	> 1,000 Cycles




Production Status
2 Weeks Lead-Time
for Shipping


TYPE: KPC240F185F 2.4 mm Female/1.85 mm Female

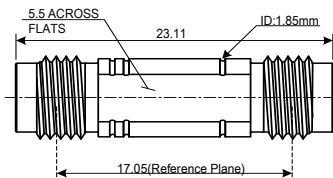


TYPE: KPC240F185M 2.4 mm Female/1.85 mm Male

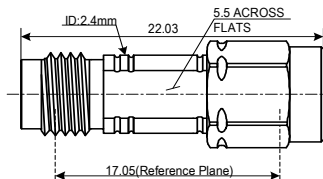



TYPE: KPC240M185F 2.4 mm Male/1.85 mm Female

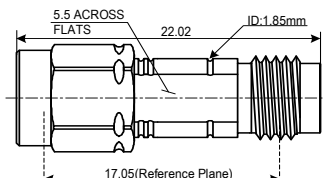

TYPE: KPC240M185M 2.4 mm Male/1.85 mm Male

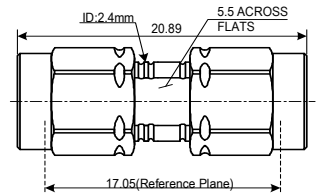


Typical Performance

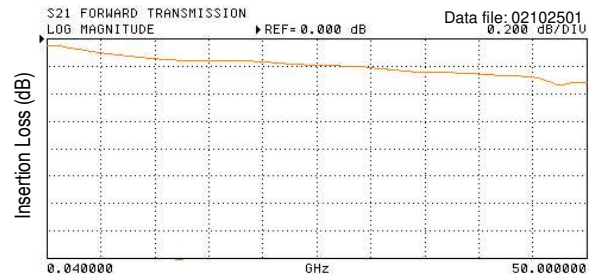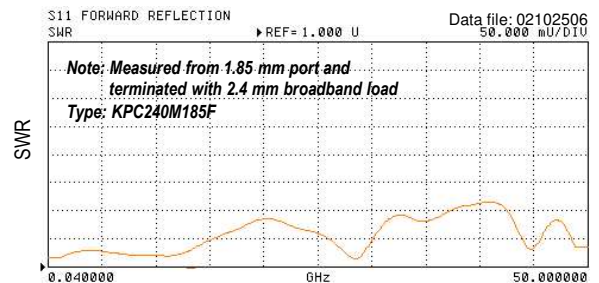


These adapters are designed to eliminate SWR degradation as shown in the below chart.

This 2.4 mm/2.4 mm coaxial adapter is mated to 1.85 mm test port cables (Example: KMCO "KPC240MF")

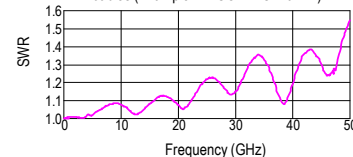

Interface Mating Dimensions of KPC240 (2.4 mm Connectors) and KPC185 (1.85 mm Connectors)

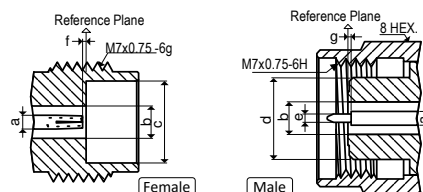

NOTE:
All dimensions are in millimeters.

KPC240(2.4 mm)	
a	φ 1.042
b	φ 2.400
c	φ 4.770
d	φ 4.750
e	φ 0.511
f	0-0.050
g	0-0.050

KPC185(1.85 mm)	
a	φ 0.803
b	φ 1.850
c	φ 4.770
d	φ 4.750
e	φ 0.511
f	0-0.050
g	0-0.050

RoHS Compliant

REACH Compliant

Specifications Subject to Change Without Notice

Copyright(C) 2002-2021 Kawashima Manufacturing Co., Ltd. <All rights reserved.>

Rev. 03 June 2017



Kawashima Manufacturing Co., Ltd.

1-3-5 Higashi-ikuta, Tama-ku,
Kawasaki 214-0031 JAPAN

TEL: +81-44-911-7073
https://kmco.co.jp/en/

FAX: +81-44-911-9621
e-mail: sales@kmco.co.jp

2.92 mm/1.85 mm DC - 40 GHz, Coaxial Adapters, Between-Series

DESCRIPTION

"KPC292F185F, KPC292F185M, KPC292M185F, and KPC292M185M"

coaxial adapters between 2.92 mm and 1.85 mm are small size, low SWR, and low loss.

They are designed for broadband measurement, instrument, and system applications.

SPECIFICATIONS

Electrical:

Frequency Range	DC - 40 GHz
SWR	< 1.3
Insertion Loss	< 0.35 dB
Electrical Length	17.5 mm (Nominal)
Temperature Range	-55 to +125 °C


Mechanical:

Body and Outer Conductor	Passivated Stainless Steel
Inner Conductor	Gold Plated Beryllium Copper and Brass
Coupling Torque	90 N-cm (Nominal)
Connect/Disconnect Life	> 1,000 Cycles




Production Status
2 Weeks Lead-Time
for Shipping


TYPE: KPC292F185F 2.92 mm Female/1.85 mm Female

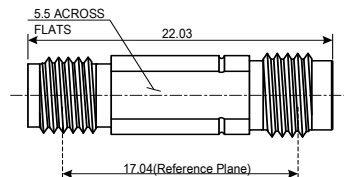


TYPE: KPC292F185M 2.92 mm Female/1.85 mm Male

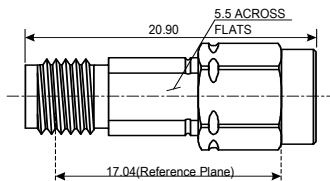



TYPE: KPC292M185F 2.92 mm Male/1.85 mm Female

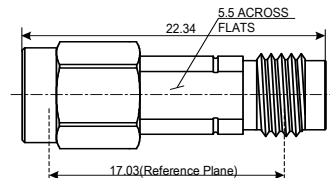

TYPE: KPC292M185M 2.92 mm Male/1.85 mm Male

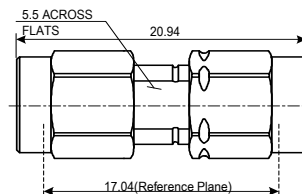

Typical Performance

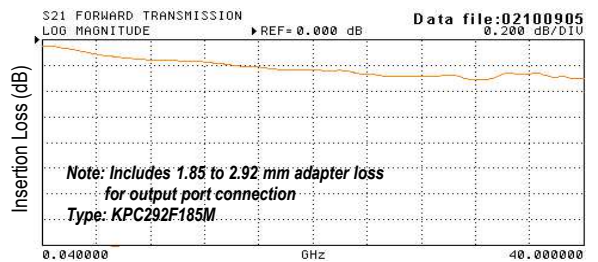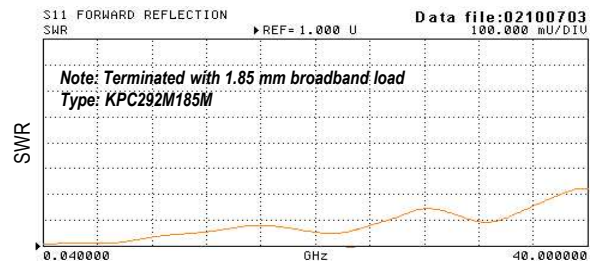


RoHS Compliant

REACH Compliant

Interface Mating Dimensions

KPC292 (2.92 mm Connectors)

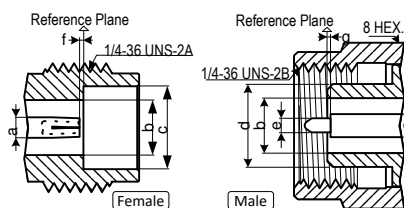


KPC292(2.92 mm)	
a	φ 1.270
b	φ 2.920
c	φ 4.640
d	φ 4.580
e	φ 0.920
f	0-0.050
g	0-0.050

NOTE:

All dimensions are in millimeters.

KPC185 (1.85 mm Connectors <*>)

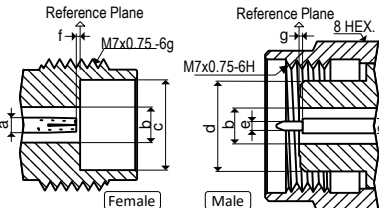

KPC185(1.85 mm)	
a	φ 0.803
b	φ 1.850
c	φ 4.770
d	φ 4.750
e	φ 0.511
f	0-0.050
g	0-0.050

<*> Matable with 2.4 mm connectors

Specifications Subject to Change Without Notice

Copyright(C) 2002-2021 Kawashima Manufacturing Co., Ltd. <All rights reserved.>

Rev. 03 June 2017



Kawashima Manufacturing Co., Ltd.

1-3-5 Higashi-ikuta, Tama-ku,
Kawasaki 214-0031 JAPAN

TEL: +81-44-911-7073
https://kmco.co.jp/en/

FAX: +81-44-911-9621
e-mail: sales@kmco.co.jp

2.92 mm/2.4 mm DC - 40 GHz, Coaxial Adapters, Between-Series

DESCRIPTION

"KPC292F240F, KPC292F240M, KPC292M240F, and KPC292M240M" coaxial adapters between 2.92 mm and 2.4 mm are small size, low SWR, and low loss. They are designed for broadband measurement, instrument, and system applications.

SPECIFICATIONS

Electrical:

Frequency Range	DC - 40 GHz
SWR	< 1.22
Insertion Loss	< 0.25 dB
Electrical Length	17.5 mm (Nominal)
Temperature Range	-55 to +125 °C


Mechanical:

Body and Outer Conductor	Passivated Stainless Steel
Inner Conductor	Gold Plated Beryllium Copper and Brass
Coupling Torque	90 N-cm (Nominal)
Connect/Disconnect Life	> 1,000 Cycles




Production Status
2 Weeks Lead-Time
for Shipping


TYPE: KPC292F240F 2.92 mm Female/2.4 mm Female

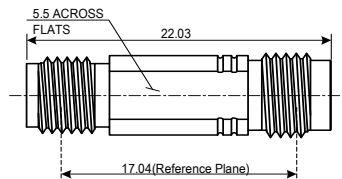


TYPE: KPC292F240M 2.92 mm Female/2.4 mm Male

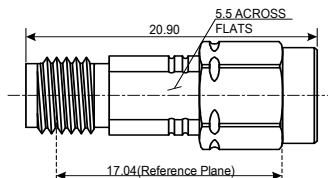



TYPE: KPC292M240F 2.92 mm Male/2.4 mm Female

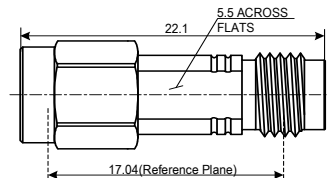

TYPE: KPC292M240M 2.92 mm Male/2.4 mm Male

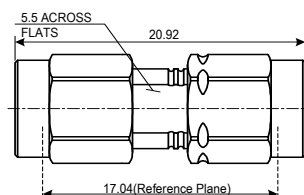

Typical Performance

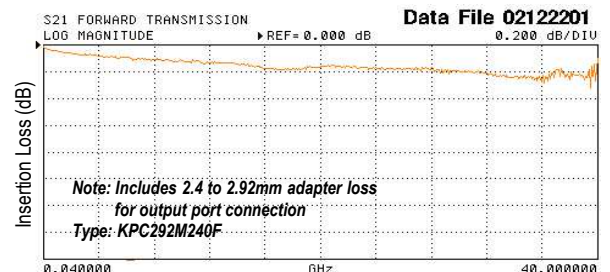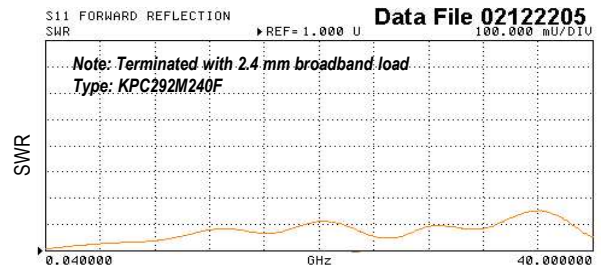


RoHS Compliant

REACH Compliant


Interface Mating Dimensions

KPC292 (2.92 mm Connectors)

KPC292(2.92 mm)	
a	φ 1.270
b	φ 2.920
c	φ 4.640
d	φ 4.580
e	φ 0.920
f	0-0.050
g	0-0.050

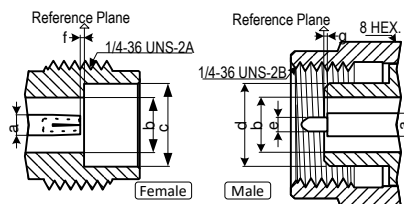

KPC240 (2.4 mm Connectors)

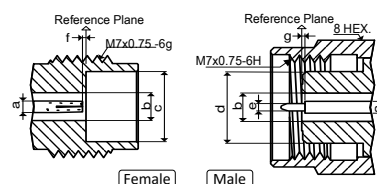

KPC240(2.4 mm)	
a	φ 1.042
b	φ 2.400
c	φ 4.770
d	φ 4.750
e	φ 0.511
f	0-0.050
g	0-0.050

NOTE:

All dimensions are in millimeters.

Specifications Subject to Change Without Notice

Rev. 03 June 2017

Copyright(C) 2002-2021 Kawashima Manufacturing Co., Ltd. <All rights reserved.>



Kawashima Manufacturing Co., Ltd.

1-3-5 Higashi-ikuta, Tama-ku,
Kawasaki 214-0031 JAPAN

TEL: +81-44-911-7073
https://kmco.co.jp/en/

FAX: +81-44-911-9621
e-mail: sales@kmco.co.jp

3.5 mm/2.4 mm DC - 26.5 GHz, Coaxial Adapters, Between-Series

DESCRIPTION

"KPC350F240F, KPC350F240M, KPC350M240F, and KPC350M240M" coaxial adapters between 3.5 mm and 2.4 mm are small size, low SWR, and low loss. They are designed for broadband measurement, instrument, and system applications.

SPECIFICATIONS

Electrical:

Frequency Range	DC - 26.5 GHz (Moding: 34GHz)
SWR	< 1.2
Insertion Loss	< 0.3 dB
Electrical Length	17.5 mm (Nominal)
Temperature Range	-55 to +125 °C


Mechanical:

Body and Outer Conductor	Passivated Stainless Steel
Inner Conductor	Gold Plated Beryllium Copper and Brass
Coupling Torque	90 N-cm (Nominal)
Connect/Disconnect Life	> 1,000 Cycles




Production Status
2 Weeks Lead-Time
for Shipping


TYPE: KPC350F240F 3.5 mm Female/2.4 mm Female

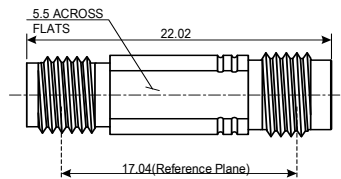


TYPE: KPC350F240M 3.5 mm Female/2.4 mm Male

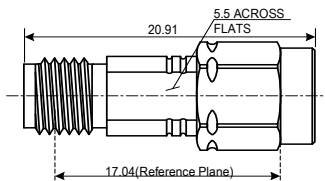


TYPE: KPC350M240F 3.5 mm Male/2.4 mm Female

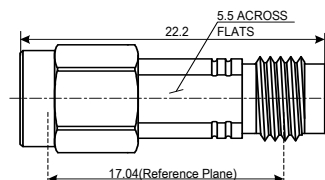

TYPE: KPC350M240M 3.5 mm Male/2.4 mm Male

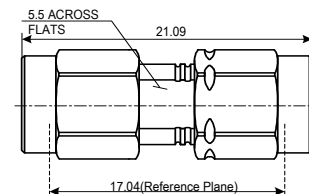

Typical Performance

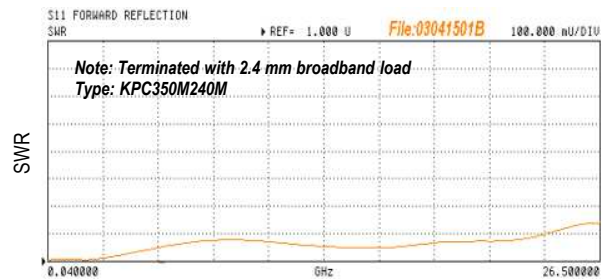

1.85 mm/1.85 mm Panel Adapter, In-Series

DC - 65 GHz, Coaxial Panel Adapters for Front Access Ports

DESCRIPTION

"KPC185MF FPA" coaxial front panel adapter is easy to mate, low SWR, and low insertion loss. It is designed for frequently connected/disconnected broadband measurement, instrument, and system applications.

SPECIFICATIONS

Electrical:

Frequency Range	DC - 65 GHz
SWR	< 1.3
Insertion Loss	< 0.5 dB
Electrical Length	Shown below (Nominal)
Temperature Range	-55 to +125 °C

Mechanical:



Body	Passivated Stainless Steel (*)
Outer Conductor	Gold Plated Stainless Steel
Inner Conductor	Gold Plated Beryllium Copper
Coupling Torque	90 N-cm (Nominal)
Connect/Disconnect Life	> 1,000 Cycles




Production Status
3 Weeks Lead-Time
for Shipping

TYPE: KPC185MF FPA

1.85 mm Male/1.85 mm Female

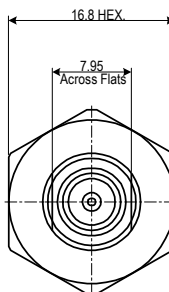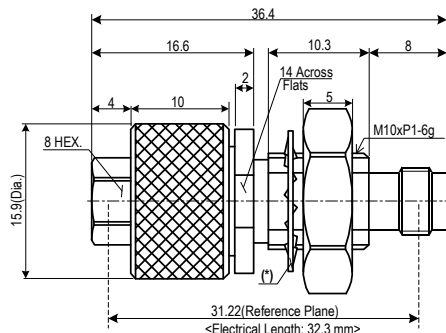

Mounting Hole and Thickness
(Recommended)




Thickness: 2 to 5.4 mm

Typical Performance

Number of Samples: 13 pcs

S/N 03120401-03120413

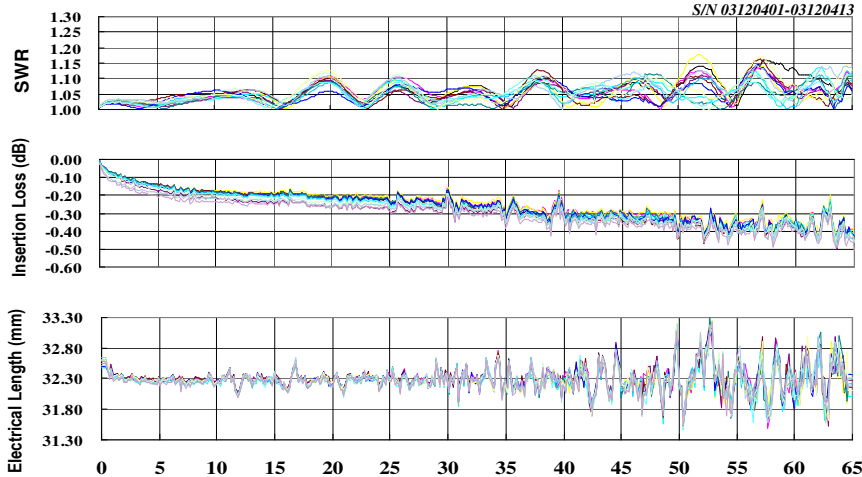



Interface Mating Dimensions of KPC185MF FPA (1.85 mm Connectors <*>)

NOTE:

All dimensions are in millimeters.

(*) Toothed lockwasher is nickel-plated steel.

KPC185(1.85 mm)	
a	φ 0.803
b	φ 1.850
c	φ 4.770
d	φ 4.750
e	φ 0.511
f	0-0.050
g	0-0.050



<*> Matable with 2.4 mm connectors

RoHS Compliant

REACH Compliant

Specifications Subject to Change Without Notice

Copyright(C) 2002-2021 Kawashima Manufacturing Co., Ltd. <All rights reserved.>

Rev. 03 June 2017



Kawashima Manufacturing Co., Ltd.

1-3-5 Higashi-ikuta, Tama-ku,
Kawasaki 214-0031 JAPAN

TEL: +81-44-911-7073
https://kmco.co.jp/en/

FAX: +81-44-911-9621
e-mail: sales@kmco.co.jp

2.92 mm/2.92 mm Panel Adapter, In-Series DC - 40 GHz, Coaxial Panel Adapters for Front Access Ports

DESCRIPTION

"KPC292MF FPA" coaxial front panel adapter is easy to mate, good return loss, and low insertion loss. It is designed for frequently connected/disconnected broadband measurement, instrument, and system applications.

SPECIFICATIONS

Electrical:

Frequency Range	DC - 40 GHz
SWR	< 1.15
Insertion Loss	< 0.3 dB
Electrical Length	Shown below (Nominal)
Temperature Range	-55 to +125 °C

Mechanical:



Body	Passivated Stainless Steel (*)
Outer Conductor	Gold Plated Stainless Steel
Inner Conductor	Gold Plated Beryllium Copper
Coupling Torque	90 N-cm (Nominal)
Connect/Disconnect Life	> 1,000 Cycles



Production Status
3 Weeks Lead-Time
for Shipping

TYPE: KPC292MF FPA

2.92 mm Male/2.92 mm Female

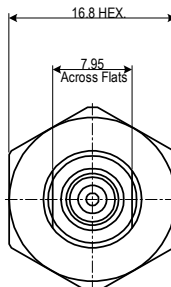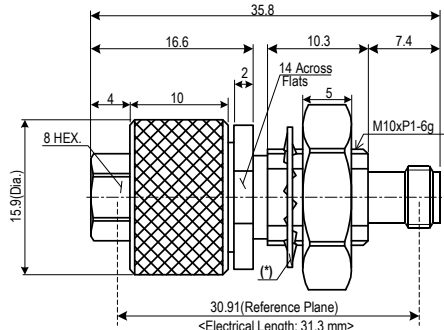


Mounting Hole and Thickness
(Recommended)



Thickness: 2 to 5.4 mm

Typical Performance

Number of Samples: 7 pcs

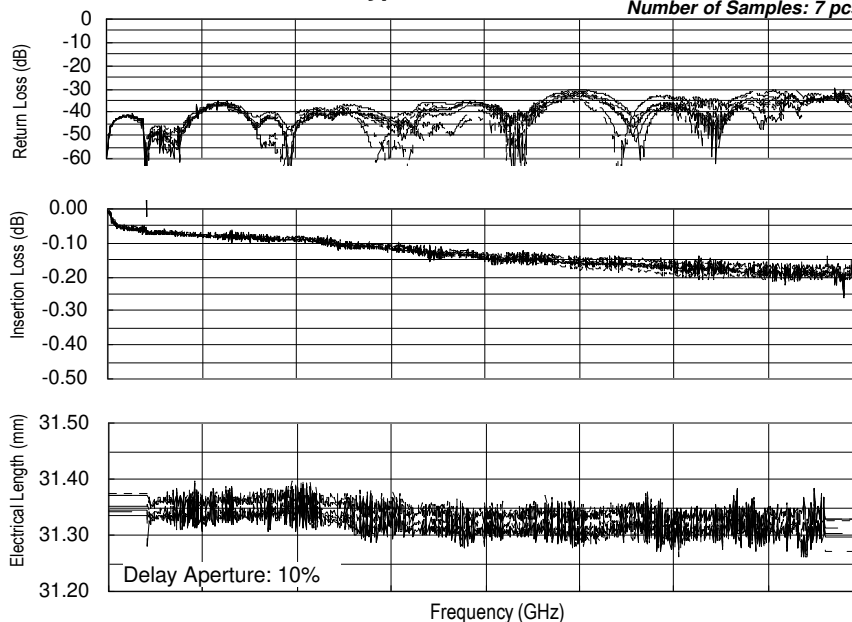



Interface Mating Dimensions of KPC292MF FPA (2.92 mm Connectors) <*>

NOTE:

All dimensions are in millimeters.

(*)Toothed lockwasher is nickel-plated steel.

KPC292(2.92 mm)	
a	φ 1.270
b	φ 2.920
c	φ 4.640
d	φ 4.580
e	φ 0.920
f	0-0.050
g	0-0.050



RoHS Compliant

REACH Compliant

<*> Matable with 3.5 mm connectors and SMA

Specifications Subject to Change Without Notice

Rev. 03 June 2017

Copyright(C) 2002-2021 Kawashima Manufacturing Co., Ltd. <All rights reserved.>



Kawashima Manufacturing Co., Ltd.

1-3-5 Higashi-ikuta, Tama-ku,
Kawasaki 214-0031 JAPAN

TEL: +81-44-911-7073
https://kmco.co.jp/en/

FAX: +81-44-911-9621
e-mail: sales@kmco.co.jp

Panel Adapter, In Series

1.85 mm for DC - 65 GHz, 2.92 mm for 40 GHz Coaxial Panel Adapters

DESCRIPTION

"KPC185FFPA and KPC292FFPA" coaxial panel adapters are 9.5 mm "D"-holed panel mountable, low SWR, and low loss. They are designed for broadband measurement, instrument, and system applications.

SPECIFICATIONS

Electrical:

Frequency Range	DC - 65 GHz (1.85 mm) DC - 40 GHz (2.92 mm)
SWR	< 1.3 (1.85 mm) < 1.15 (2.92 mm)
Insertion Loss	< 0.4 dB (1.85 mm) < 0.25 dB (2.92 mm)
Electrical Length	Shown below (Nominal)
Temperature Range	-55 to +125 °C

Mechanical:


Body	Passivated Stainless Steel (*)
Outer Conductor	Passivated Stainless Steel (1.85 mm) (*) Gold Plated Stainless Steel (2.92 mm)
Inner Conductor	Gold Plated Beryllium Copper and Brass (1.85 mm) Gold Plated Beryllium Copper (2.92 mm)
Coupling Torque	90 N-cm (Nominal)
Connect/Disconnect Life	> 1,000 Cycles



Production Status
2 Weeks Lead-Time
for Shipping


TYPE: KPC185FFPA

1.85 mm Female/1.85 mm Female

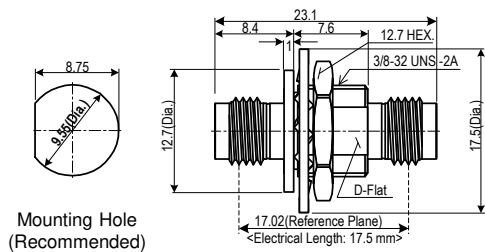


TYPE: KPC292FFPA

2.92 mm Female/2.92 mm Female

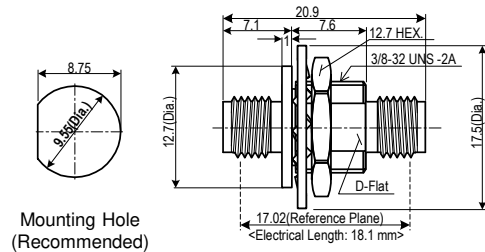

Typical Performance

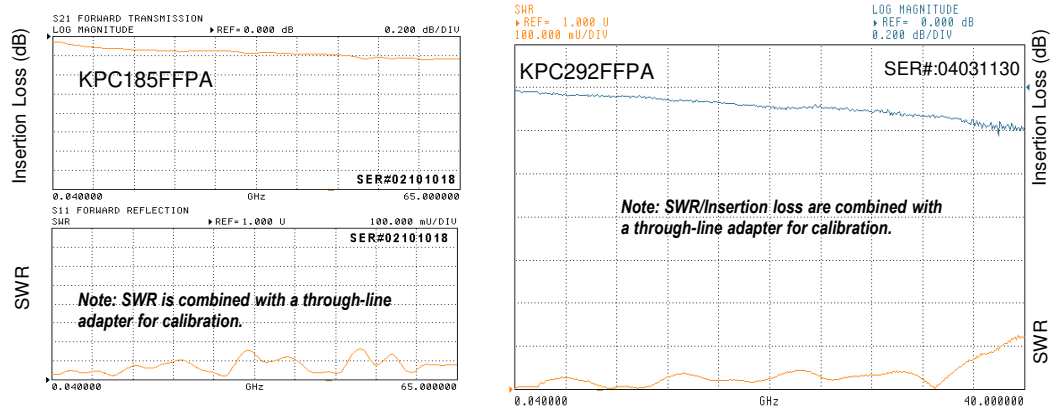


RoHS Compliant


REACH Compliant

Interface Mating Dimensions

KPC185 (1.85 mm Connectors <*>)

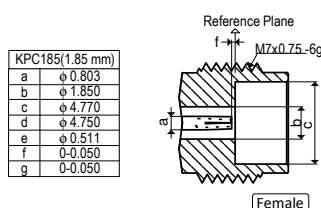

KPC292 (2.92 mm Connectors)

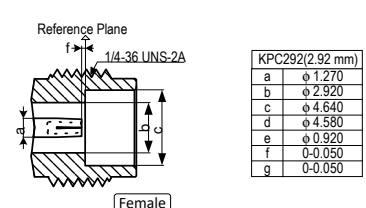

NOTE:

All dimensions are in millimeters.

(*)Toothed lockwasher is chromate-converted zinc-plated steel.

<*> Matable with 2.4 mm connectors

Specifications Subject to Change Without Notice

Rev. 03 June 2017

Copyright(C) 2002-2021 Kawashima Manufacturing Co., Ltd. <All rights reserved.>



Kawashima Manufacturing Co., Ltd.

1-3-5 Higashi-ikuta, Tama-ku,
Kawasaki 214-0031 JAPAN

TEL: +81-44-911-7073
https://kmco.co.jp/en/

FAX: +81-44-911-9621
e-mail: sales@kmco.co.jp

DC - 65 GHz/40 GHz Panel Adapters, Between 1.85 mm/SMPM and 2.92 mm/SMPM Panel Adapters

DESCRIPTION

"KPC185F-SMPM-FD-PA and
"KPC292F-SMPM-FD-PA" coaxial
panel adapters are 9.5 mm "D"-holed
panel mountable, low SWR, and
low loss.
They are designed for broadband
measurement, instrument, and
system applications.

Connector Interfaces

- 1.85 mm and 2.92 mm connectors
conform to IEEE-Std-287.
- SMPM male full detent interface is
as per MIL-STD-348B 328.2.

SPECIFICATIONS

Electrical:

Frequency Range	DC - 65 GHz (1.85 mm) DC - 40 GHz (2.92 mm)
SWR	< 1.5
Insertion Loss	< 0.7 dB
Temperature Range	-55 to +125 °C


Mechanical:

Body and Outer Conductor	Passivated Stainless Steel (*)
Inner Conductor	Gold Plated Beryllium Copper and Brass
Coupling Torque	90 N-cm (Nominal)
Connect/Disconnect Life	> 100 Cycles (Estimate for SMPM)




Production Status
2 Weeks Lead-Time
for Shipping




TYPE: KPC185F-SMPM-FD-PA 1.85 mm Female/SMPM-Male (Full detent)

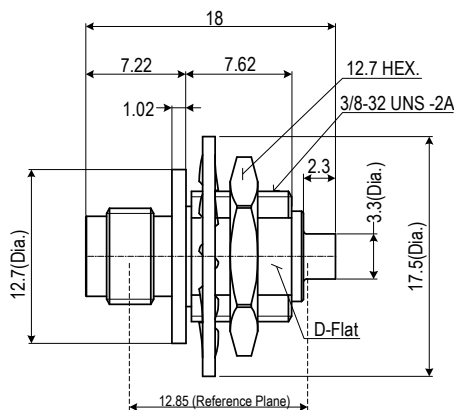

Typical Performance including coaxial adapters for SMPM

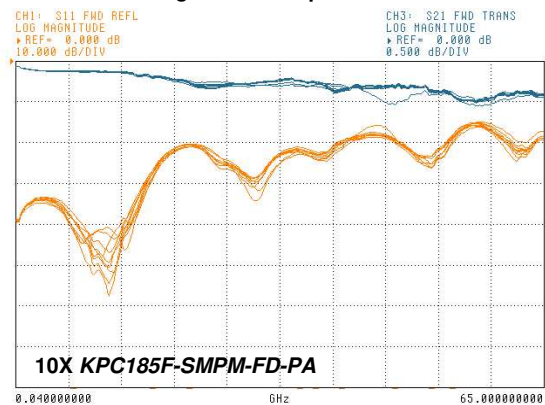

TYPE: KPC292F-SMPM-FD-PA 2.92 mm Female/SMPM-Male (Full detent)

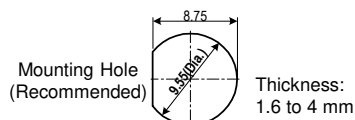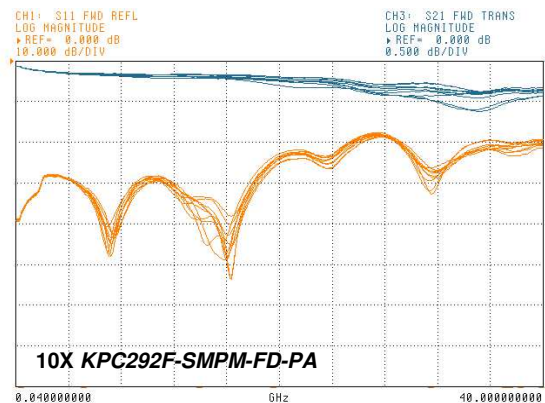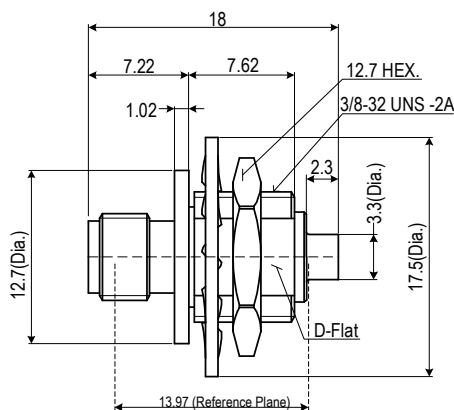

NOTE:

All dimensions are in millimeters.

(*) Toothed lockwasher is chromate-converted
zinc-plated steel.

RoHS Compliant

REACH Compliant

Specifications Subject to Change Without Notice

Rev. 05 Jun. 2024

Copyright(C) 2002-2024 Kawashima Manufacturing Co., Ltd. <All rights reserved.>



Kawashima Manufacturing Co., Ltd.

1-3-5 Higashi-ikuta, Tama-ku,
Kawasaki 214-0031 JAPAN

TEL: +81-44-911-7073
https://kmco.co.jp/en/

FAX: +81-44-911-9621
e-mail: sales@kmco.co.jp

DC - 20 GHz Panel Adapter, In-Series SMA Coaxial Panel Adapters

DESCRIPTION

"SMA-FFPA" coaxial panel adapter is 9.5 mm "D"-holed panel mountable. It is designed for telecommunication systems and test equipment.

Connector Interface Standard:

- MIL-C-39012
- MIL-STD-348B
- IEC Std-169-15

SPECIFICATIONS

Electrical:

Frequency Range	DC - 20 GHz (*)
SWR	< 1.2
Insertion Loss	< 0.1 dB
Input Power	10 W (max)
Temperature Range	-55 to +85 °C



Mechanical:

Outer Conductor	Passivated Stainless Steel (**)
Inner Conductor	Gold Plated Beryllium Copper
Coupling Torque	56 N-cm (Nominal)
Connect/Disconnect Life	> 5,000 Cycles (***)




TYPE: SMA-FFPA

Female/Female Outline

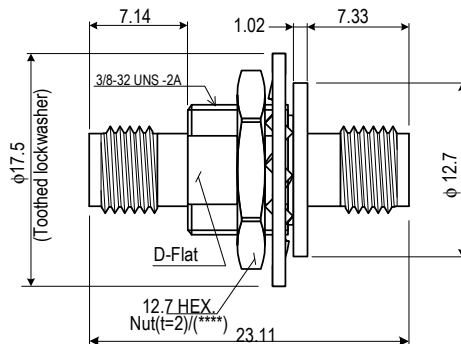


Mounting Hole
(Recommended)

RF Performance ("Non-Insertable Device" Calibration)

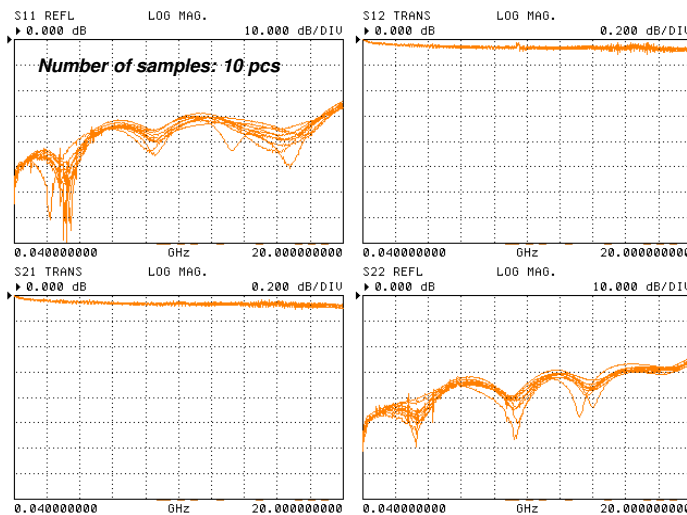

Connect/Disconnect Life ("Non-Insertable Device" Calibration with Time Domain Measurement)

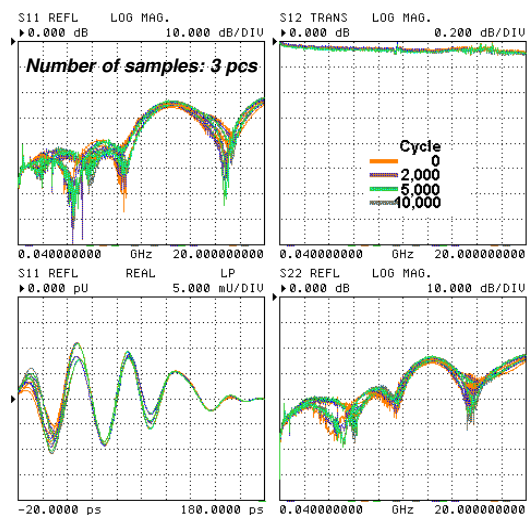

NOTE:

All dimensions are in millimeters.

(*) Moding frequency: 24.7 GHz (theoretically)

(**) Toothed lockwasher is chromate (trivalent) converted zinc-plated steel

(***) Connect/disconnect speed: 10 cycles per minute (conforms to MIL-C-39012/60)

(****) Recommended tightening torque: 300 to 420 N-cm

RoHS Compliant

REACH Compliant

Specifications Subject to Change Without Notice

Rev. 04 Jun. 2024

Copyright(C) 2002-2024 Kawashima Manufacturing Co., Ltd. <All rights reserved.>



Kawashima Manufacturing Co., Ltd.

1-3-5 Higashi-ikuta, Tama-ku,
Kawasaki 214-0031 JAPAN

TEL: +81-44-911-7073
https://kmco.co.jp/en/

FAX: +81-44-911-9621
e-mail: sales@kmco.co.jp

90 degree Angled-Swept Adaptor, Male to Female SMA Coaxial Adapters

DESCRIPTION

"SMA-525S" 90 degree angled-swept adaptor is designed for telecommunication systems and test equipment.

Connector Interface Standard:

- MIL-C-39012
- MIL-STD-348B
- IEC Std-169-15

SPECIFICATIONS

Electrical:

Frequency Range	DC - 24.6 GHz (*)
SWR	< 1.25 (to 20 GHz) < 1.5 (to 24.6 GHz)
Insertion Loss	< 0.15 dB (to 20 GHz) < 0.23 dB (to 24.6 GHz)
Input Power	10 W (max)
Temperature Range	-55 to +85 °C

Mechanical:


Outer Conductor	Nickel Plated Stainless Steel
Inner Conductor	Gold Plated Beryllium Copper
Coupling Torque	56 N-cm (Nominal)
Connect/Disconnect Life	> 500 Cycles (**)



Production Status
2 Weeks Lead-Time
for Shipping


TYPE: SMA-525S

Male/Female Outline

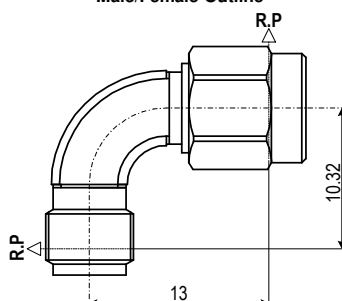

RF Performance

("Insertable Device" Calibration in 3.5 mm System)

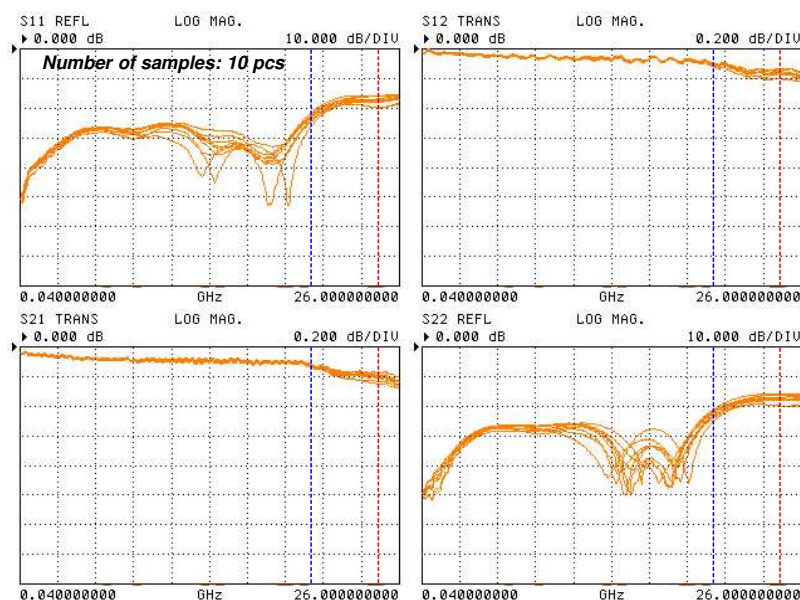

NOTE:

All dimensions are in millimeters.

(*) Moding frequency: 24.7 GHz (theoretically)

(**) Connect/disconnect speed: 10 cycles per minute (conforms to MIL-C-39012/60)

RoHS Compliant

REACH Compliant

Specifications Subject to Change Without Notice

Rev. 04 Jun. 2024

Copyright(C) 2002-2024 Kawashima Manufacturing Co., Ltd. <All rights reserved.>



Kawashima Manufacturing Co., Ltd.

1-3-5 Higashi-ikuta, Tama-ku,
Kawasaki 214-0031 JAPAN

TEL: +81-44-911-7073
<https://kmco.co.jp/en/>

FAX: +81-44-911-9621
e-mail: sales@kmco.co.jp

Coaxial Hermetic Adapters, Within (Conform to IEEE-Std-287)



1.85 mm

Up to 65 GHz



2.92 mm

Up to 40 GHz

1.85 mm/1.85 mm DC - 65 GHz, Hermetically Sealed, Coaxial Adapters

DESCRIPTION

"KPC185FFHA" is hermetically sealed 1.85 mm to 1.85 mm coaxial adapter that is;
-Low SWR and low loss
-Hermetic RF interface between vacuum and atmosphere environment
-Small mounting space
It is designed for broadband devices, instrument, and component testing applications.

SPECIFICATIONS

Electrical:

Frequency Range

SWR

Insertion Loss

Electrical Length

Temperature Range

DC - 65 GHz

< 1.5

< 0.7 dB

Shown below (Nominal)

-55 to +125 °C

Mechanical:

Body and Outer Conductor

Inner Conductor

Inner and Outer Conductor for Seal

Insulator for Seal

Gasket for Flange Seal

Coupling Torque

Connect/Disconnect Life

He Leak Rate (*)

Gold Plated Stainless Steel

Gold Plated Beryllium Copper

Gold Plated Fe/Ni/Co Alloy (KOVAR)

#7070 Glass (Corning)

Fluoroelastomer "O" Ring

90 N-cm (Nominal)


> 1,000 Cycles

< 1×10^{-10} Pam³/sec (< 1×10^{-9} atm cc /sec)




Production Status
4 Weeks Lead-Time
for Shipping

TYPE: KPC185FFHA 1.85 mm Female/1.85 mm Female

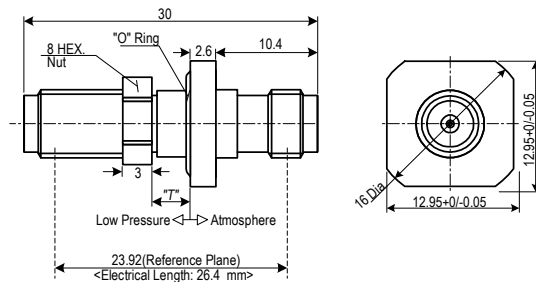

"T" : Vacuum wall or flange thickness:
4 mm (min) to 8 mm (max)



Typical Performance

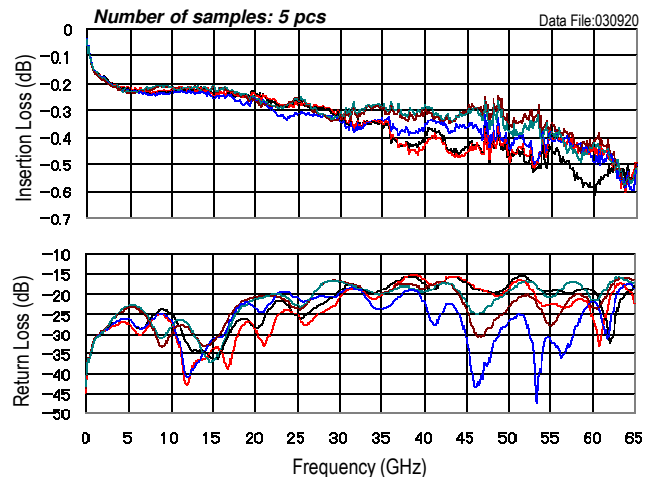

Recommended Mounting Hole and Installation

Single or Separated Multi Port Installation

Spaced "13 mm" Multi Port Installation

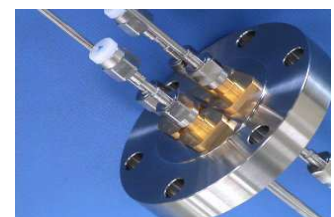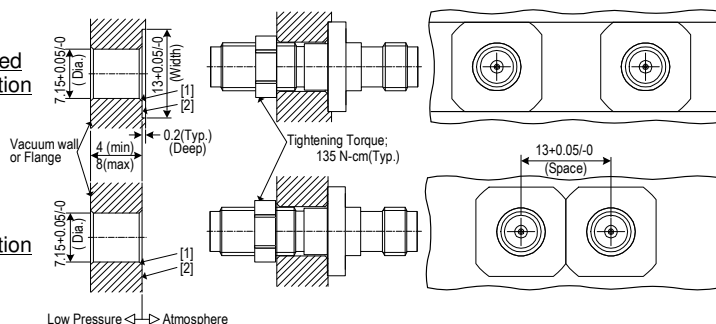

Example of 4 Adapters Mounted to
70 mm diameter. Vacuum Flange

Interface Mating Dimensions of KPC185 (1.85 mm Connectors <*>)


NOTE:

All dimensions are in millimeters.

[1] Corners: < 0.05 x 0.05 mm

[2] "Smooth surface" required

(*) As Per MIL-STD-883E, METHOD1014.10,
Test Condition A4

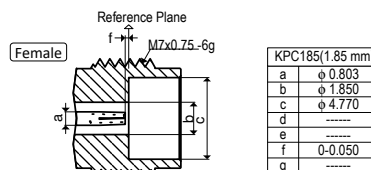

<*> Matable with 2.4 mm connectors

RoHS Compliant

REACH Compliant

Specifications Subject to Change Without Notice

Rev. 03 June 2017

Copyright(C) 2002-2021 Kawashima Manufacturing Co., Ltd. <All rights reserved.>



Kawashima Manufacturing Co., Ltd.

1-3-5 Higashi-ikuta, Tama-ku,
Kawasaki 214-0031 JAPAN

TEL: +81-44-911-7073
https://kmco.co.jp/en/

FAX: +81-44-911-9621
e-mail: sales@kmco.co.jp

2.92 mm/2.92 mm DC - 40 GHz, Hermetically Sealed, Coaxial Adapters

DESCRIPTION

"KPC292FFHA" is hermetically sealed 2.92 mm to 2.92 mm coaxial adapter that is;
-Low SWR and low loss
-Hermetic RF interface between vacuum and atmosphere environment
-Small mounting space
It is designed for broadband devices, instrument, and component testing applications.

SPECIFICATIONS

Electrical:

Frequency Range DC - 40 GHz
SWR < 1.5
Insertion Loss < 0.45 dB
Electrical Length Below (Nominal)
Temperature Range -55 to +125 °C


Mechanical:

Body and Outer Conductor Gold Plated Stainless Steel and Brass
Inner Conductor Gold Plated Beryllium Copper
Inner and Outer Conductor for Seal Gold Plated Fe/Ni/Co Alloy (KOVAR)
Insulator for Seal #7070 Glass (Corning)
Gasket for Flange Seal Fluoroelastomer "O" Ring
Coupling Torque 90 N-cm (Nominal)
Connect/Disconnect Life > 1,000 Cycles
He Leak Rate (*) < 1×10^{-10} Pam³/sec (< 1×10^{-9} atm cc/sec)




Production Status
4 Weeks Lead-Time
for Shipping

TYPE: KPC292FFHA 2.92 mm Female/2.92 mm Female

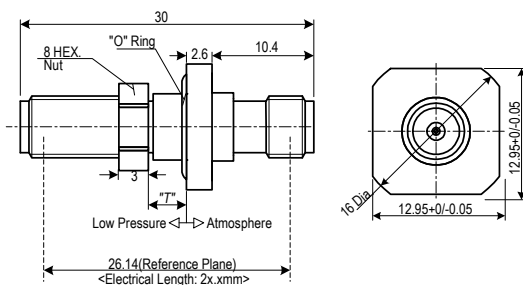


"T": Vacuum wall or flange thickness:
4 mm (min) to 8 mm (max)

Typical Performance

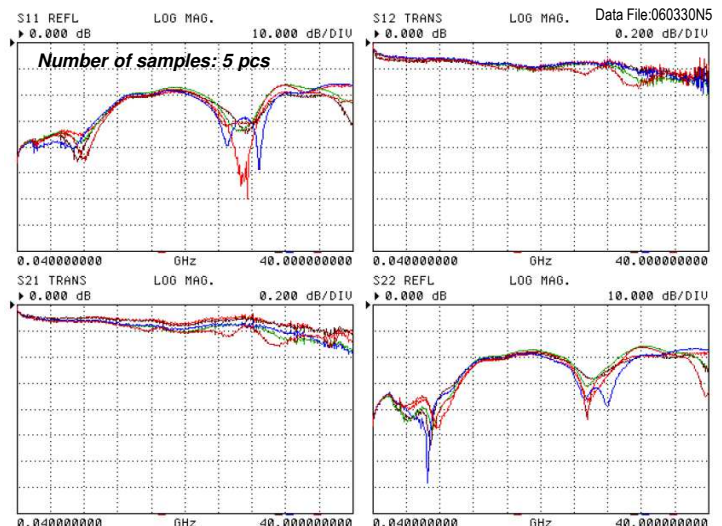

Recommended Mounting Hole and Installation

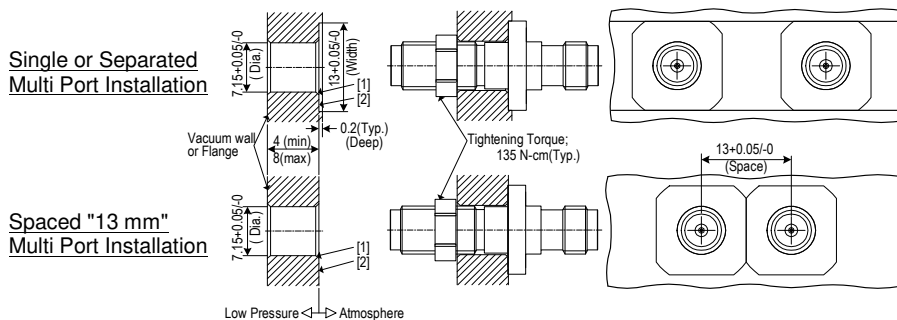

Interface Mating Dimensions of KPC292 (2.92 mm Connectors <*>)


NOTE:

All dimensions are in millimeters.

[1] Chamfer: < 0.05 mm

[2] "Smooth surface" required

(*) As Per MIL-STD-883E, METHOD1014.10,
Test Condition A4

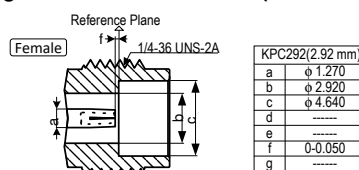

<*> Matable with 3.5 mm and SMA

RoHS Compliant

REACH Compliant

Specifications Subject to Change Without Notice

Rev. 03 June 2017

Copyright(C) 2002-2021 Kawashima Manufacturing Co., Ltd. <All rights reserved.>



Kawashima Manufacturing Co., Ltd.

1-3-5 Higashi-ikuta, Tama-ku,
Kawasaki 214-0031 JAPAN

TEL: +81-44-911-7073
https://kmco.co.jp/en/

FAX: +81-44-911-9621
e-mail: sales@kmco.co.jp

2-Hole Flange Launchers (Conform to IEEE-Std-287)



1 mm

Up to 110 GHz



1.85 mm

Up to 65 GHz



2.92 mm

Up to 40 GHz

1 mm DC - 110 GHz, Flange Launchers

DESCRIPTION

"KPC100F311 and KPC100M311"
flange launchers are designed for ultra-broadband devices and units with coaxial I/O interfaces.


SPECIFICATIONS

Electrical:

Frequency Range	DC - 110 GHz
SWR	< 1.5 (*)
Insertion Loss	1 dB (typ.) (*)
Electrical Length	11.1 mm (Nominal)
Temperature Range	-55 to +125 °C



Mechanical:

Body and Outer Conductor	Gold Plated Stainless Steel
Inner Conductor	Gold Plated Beryllium Copper and Brass
Coupling Torque	45 N-cm (Nominal)
Connect/Disconnect Life	> 500 Cycles (Estimate)

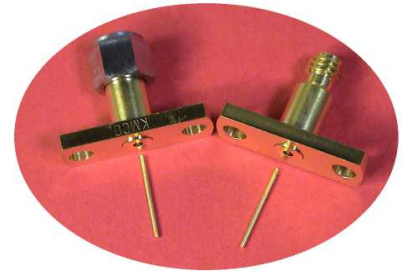



TYPE: KPC100F311

1 mm Female

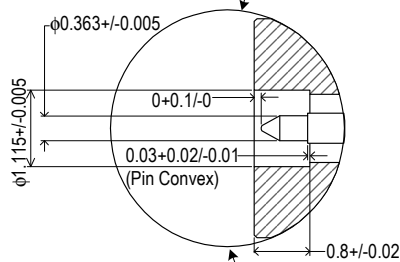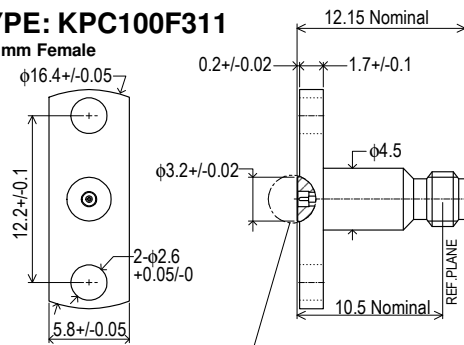

TYPE: KPC100M311

1 mm Male

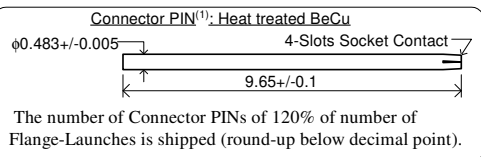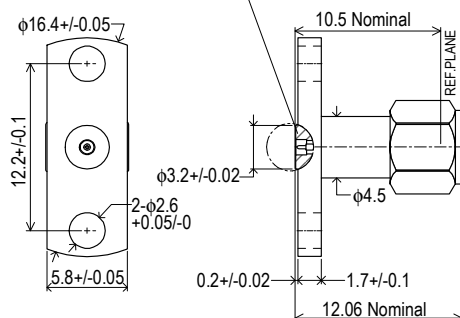


NOTE:

All dimensions are in millimeters.

(1) The tip of the pin contacts with "pin convex" in a final assembly.



Standard Test Configuration

(Insertable-Device)

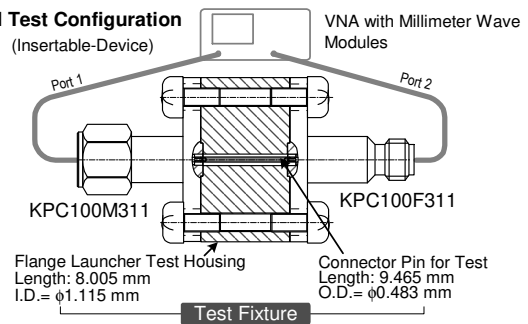


Typical Performance

Note: (*) As Standard Test Configuration

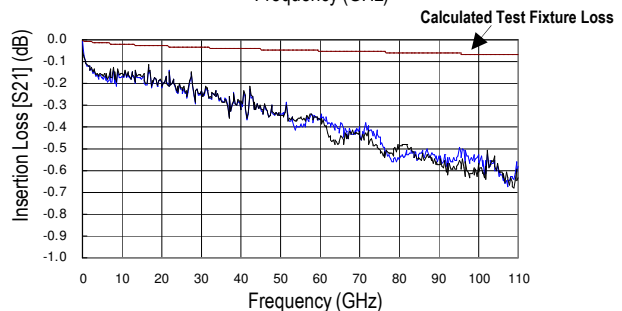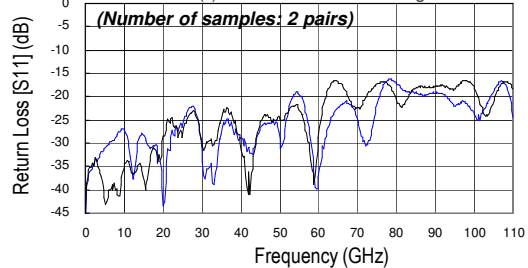

Interface Mating Dimensions of KPC100 (1 mm Connectors)

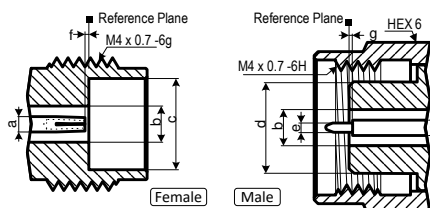

RoHS Compliant

REACH Compliant

KPC100(1 mm)	
a	φ 0.434
b	φ 1.000
c	φ 2.390
d	φ 2.358
e	φ 0.250
f	0-0.013
g	0-0.013

Specifications Subject to Change Without Notice

Copyright(C) 2002-2021 Kawashima Manufacturing Co., Ltd. <All rights reserved.>

Rev. 05 July 2020

1.85 mm DC - 65 GHz, Two-Hole Flange Launchers & Glass Beads

DESCRIPTION

"KPC185M302 and KPC185F302" two-hole flange launchers and "GB185" glass beads are designed for broadband devices and units with coaxial I/O interfaces.

SPECIFICATIONS

Connectors

Electrical:

Frequency Range	DC - 65 GHz
SWR	< 1.5 (*)
Temperature Range	-55 to +125 °C

Mechanical:

Body and Outer Conductor	Passivated Stainless Steel
Inner Conductor	Gold Plated Beryllium Copper and Brass
Coupling Torque	90 N-cm (Nominal)
Connect/Disconnect Life	> 1,000 Cycles

Glass Bead

Electrical:


Frequency Range	DC - 65 GHz
Temperature Range	-55 to +125 °C

Mechanical:

Body and Inner Conductor	Gold Plated (**) Fe/Ni/Co Alloy (Kovar)
Insulator	#7070 Glass (Corning)

Others:


Soldering Temperature	330°C (max)
He Leak Rate	< 1x10 ⁻¹⁰ Pam ³ /sec

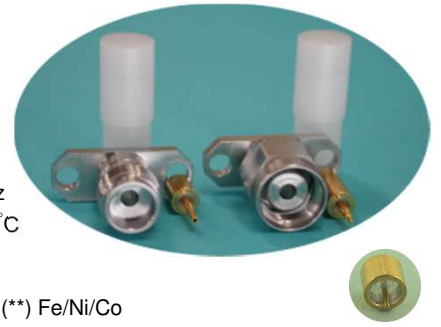

Production Status
2 Weeks Lead-Time
for Shipping


TYPE: KPC185M302

1.85 mm Male

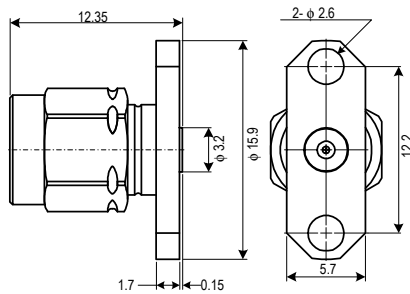


TYPE: KPC185F302

1.85 mm Female

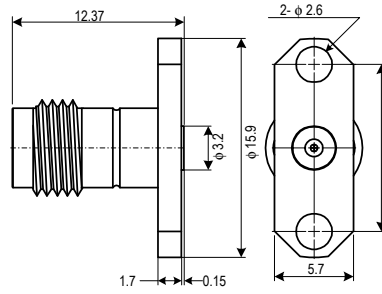


TYPE: GB185

Glass Bead




Typical Performance

Note: (*) As Standard DUT Configuration

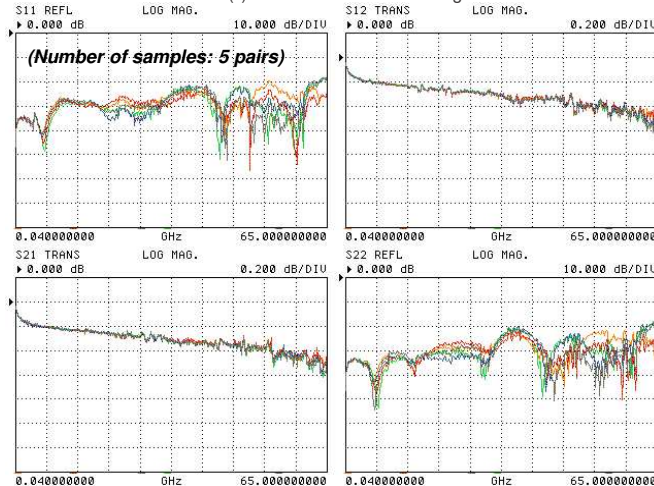

Test Configuration

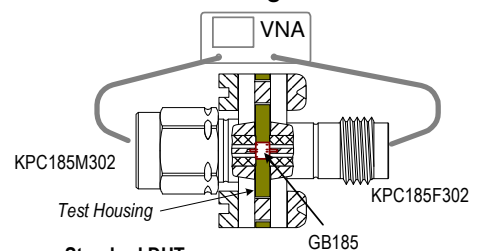

Standard DUT:

Cascaded KPC185M302, GB185, and KPC185F302



Interface Mating Dimensions of KPC185 (1.85 mm Connectors <*>)

NOTE:

All dimensions are in millimeters.

(**) Thermo-sonic wire bondable gold plating

KPC185(1.85 mm)	
a	φ0.803
b	φ1.850
c	φ4.770
d	φ4.750
e	φ0.511
f	0-0.050
g	0-0.050



<*> Matable with 2.4 mm connectors

RoHS Compliant

REACH Compliant

Specifications Subject to Change Without Notice

Rev. 03 June 2017

Copyright(C) 2002-2021 Kawashima Manufacturing Co., Ltd. <All rights reserved.>



Kawashima Manufacturing Co., Ltd.

1-3-5 Higashi-ikuta, Tama-ku, TEL: +81-44-911-7073 FAX: +81-44-911-9621
Kawasaki 214-0031 JAPAN https://kmco.co.jp/en/ e-mail: sales@kmco.co.jp

2.92 mm DC - 40 GHz, Two-Hole Flange Launchers & Glass Beads

DESCRIPTION

"KPC292F302" two-hole flange launchers and "GB292" glass beads are designed for broadband devices and units with coaxial I/O interfaces.

SPECIFICATIONS

Connectors

Electrical:

Frequency Range DC - 40 GHz
SWR < 1.5 (*)
Temperature Range -55 to +125 °C

Mechanical:

Body and Outer Conductor Passivated Stainless Steel
Inner Conductor Gold Plated Beryllium
Copper and Brass
Coupling Torque 90 N-cm (Nominal)
Connect/Disconnect Life > 1,000 Cycles

Glass Bead

Electrical:

Frequency Range DC - 40 GHz
Temperature Range -55 to +125 °C

Mechanical:

Body and Inner Conductor Gold Plated (**) Fe/Ni/Co Alloy (Kovar)
Insulator #7070 Glass (Corning)

Others:


Soldering Temperature 330°C (max)
He Leak Rate < 1x10⁻¹⁰ Pam³/sec



Production Status
2 Weeks Lead-Time
for Shipping


TYPE: KPC292F302

2.92 mm Female

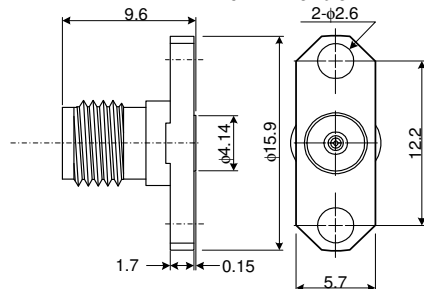


TYPE: GB292

Glass Bead




Typical Performance

Note: (*) As Standard DUT Configuration

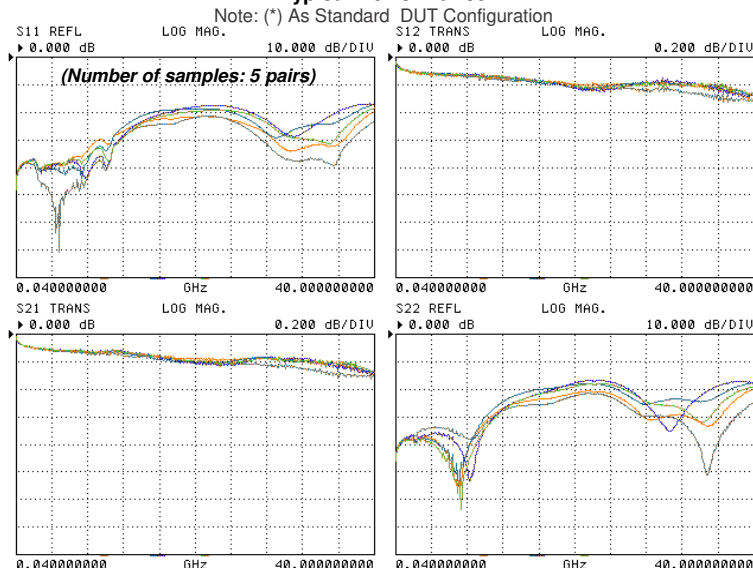

Test configuration

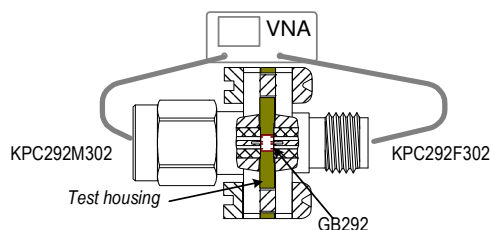


Standard DUT:

Cascaded KPC292M302 (Customized Product, On request),
GB292 and KPC292F302

Interface Mating Dimensions of KPC292 (2.92 mm Connectors)

KPC292(2.92 mm)	
a	φ 1.270
b	φ 2.920
c	φ 4.640
d	-----
e	-----
f	0-0.050
g	-----



NOTE:

All dimensions are in millimeters.

(**) Thermo-sonic wire bondable gold plating

RoHS Compliant

REACH Compliant

Specifications Subject to Change Without Notice

Rev. 03 June 2017

Copyright(C) 2002-2021 Kawashima Manufacturing Co., Ltd. <All rights reserved.>



Kawashima Manufacturing Co., Ltd.

1-3-5 Higashi-ikuta, Tama-ku,
Kawasaki 214-0031 JAPAN

TEL: +81-44-911-7073
https://kmco.co.jp/en/

FAX: +81-44-911-9621
e-mail: sales@kmco.co.jp

Semirigid Cable Assemblies, Within (Conform to IEEE-Std-287)



1 mm

Up to 110 GHz



1.85 mm

Up to 60/65 GHz

2.4 mm

Up to 50 GHz

2.92 mm

Up to 40 GHz

Semirigid Cable Assemblies, Between (Conform to IEEE-Std-287)



1 mm/1.85 mm

Up to 67 GHz



2.4 mm / 1.85 mm

Up to 50 GHz

2.92 mm / 1.85 mm

Up to 40 GHz

2.92 mm / 2.4 mm

Up to 40 GHz



1.85 mm/SMPM (*)

Up to 65 GHz

2.4 mm /SMPM (*)

Up to 50 GHz

2.92 mm/SMPM (*)

Up to 40 GHz

SemiFlex Cable Assemblies (Conform to IEEE-Std-287)



1 mm/1 mm

Up to 110 GHz

1.85 mm/1.85 mm

Up to 65 GHz

1.85 mm/SMPM (*)

Up to 65 GHz

2.92 mm/2.92 mm

Up to 40 GHz

2.92 mm/SMPM (*)

Up to 40 GHz

(*) Compatible with "GPPO" and "Mini SMP"

Re-Formable Semirigid Cable Assemblies, In-Series Connector Interface 1 mm for DC - 110 GHz

DESCRIPTION

"CA100FF, MF, and MM"

re-formable semirigid cable assemblies are up to 110 GHz and **easy to install with bending by hand** at your lab/site. They are designed for broadband measurement, instrument, and system applications.

All materials are "**lead free**".

SPECIFICATIONS

See below table.

CABLE PROPERTIES

Outer Conductor	1.19 mm Diameter Copper with Cu/Sn/Zn Plated
Center Conductor	Silver Plated Copper
Insulator	PTFE
Moding Frequency	112 GHz (Approx.)
Delay Time	0.476 ns/100 mm
Inside Bending Radius	3 mm (min)
"Non-Magnetic"	



Production Status
2 Weeks Lead-Time
for Shipping

[*] Please specify length (L: □□□□ see following table) when you order this item.

For example: CA100MM0035 (Length: 35 mm)

TYPE	Connector Interface	Frequency Range	Return Loss	Insertion Loss	Temperature Range	Length (L)
CA100FF □□□□ Female/Female	1 mm	DC-110 GHz	> 17 dB	See Fig.1	-55 to +100 °C	30 to 300 mm +/-1 mm [*] (Over 301 mm: Negotiable)
CA100MF □□□□ Male/Female						
CA100MM □□□□ Male/Male						

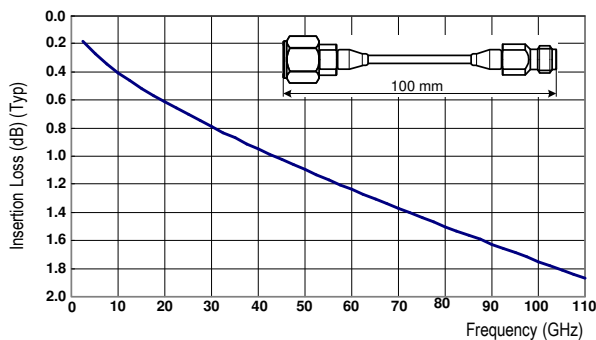


Fig.1 Frequency vs Insertion Loss, L=100 mm


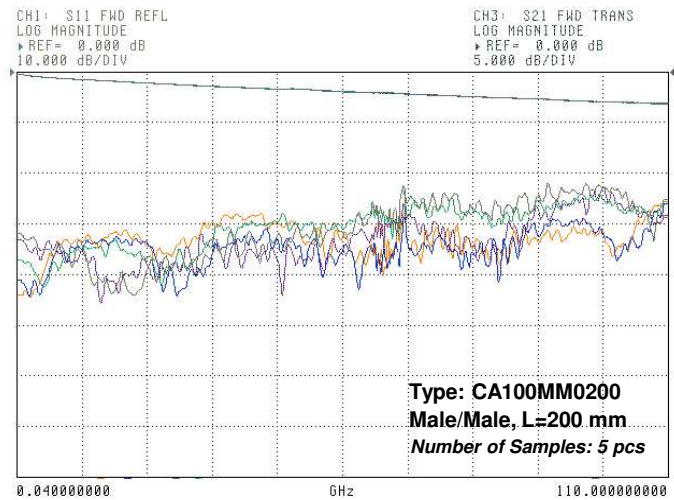


Fig. 2 Typical Performance

Interface Mating Dimensions of KPC100 (1 mm Connectors)

NOTE:

All dimensions are in millimeters.

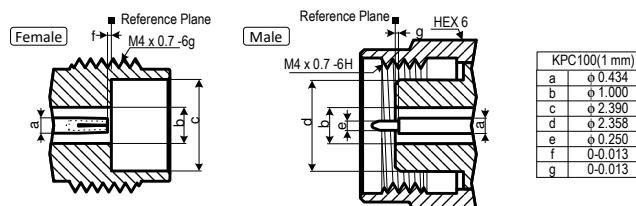

RoHS Compliant

REACH Compliant

Specifications Subject to Change Without Notice

Rev. 03 June 2017

Copyright(C) 2002-2021 Kawashima Manufacturing Co., Ltd. <All rights reserved.>



Kawashima Manufacturing Co., Ltd.

ISO9001:14001 Certified

1-3-5 Higashi-ikuta, Tama-ku,
Kawasaki 214-0031 JAPAN

TEL: +81-44-911-7073
https://kmco.co.jp/en/

FAX: +81-44-911-9621
e-mail: sales@kmco.co.jp

Re-Formable Semirigid Cable Assemblies, In-Series

Connector Interface 1.85 mm for DC - 60 GHz, 2.4 mm for DC - 50 GHz, 2.92 mm for DC - 40 GHz

DESCRIPTION

"CA185/240/292FF, MF, and MM"
re-formable semirigid cable assemblies are
up to 40, 50 and 60 GHz, and **easy to
install with bending by hand** at your
lab/site.
They are designed for broadband
measurement, instrument, and system
applications.

All materials are "lead free".

SPECIFICATIONS

Electrical:
See below table.

CABLE PROPERTIES

Outer Conductor	2.2 mm Diameter Copper with Cu/Sn/Zn Plated
Center Conductor	Silver Plated Copper
Insulator	Solid PTFE
Moding Frequency	61 GHz (Approx.)
Delay Time	0.476 ns/100 mm
Inside Bending Radius	3.2 mm (min)
"Non-Magnetic"	




Production Status
2 Weeks Lead-Time
for Shipping

[*] Please specify length (L: □□□□ see following table) when you order this item.

For example: CA185MM0035 (Length: 35 mm)

TYPE	Connector Interface	Frequency Range	Return Loss	Insertion Loss	Temperature Range	Length (L)
CA185FF □□□□ Female/Female	1.85 mm	DC-60 GHz	> 18 dB	See Fig. 1	-55 to +100 °C	35 to 300 mm +/-2 mm [*] (5 mm step): Standard (Over 300 mm: Negotiable)
CA185MF □□□□ Male/Female						
CA185MM □□□□ Male/Male						
CA240FF □□□□ Female/Female	2.4 mm	DC-50 GHz	> 18 dB	See Fig. 1	-55 to +100 °C	35 to 300 mm +/-2 mm [*] (5 mm step): Standard (Over 300 mm: Negotiable)
CA240MF □□□□ Male/Female						
CA240MM □□□□ Male/Male						
CA292FF □□□□ Female/Female	2.92 mm	DC-40 GHz	> 20 dB	See Fig. 1	-55 to +100 °C	35 to 300 mm +/-2 mm [*] (5 mm step): Standard (Over 300 mm: Negotiable)
CA292MF □□□□ Male/Female						
CA292MM □□□□ Male/Male						

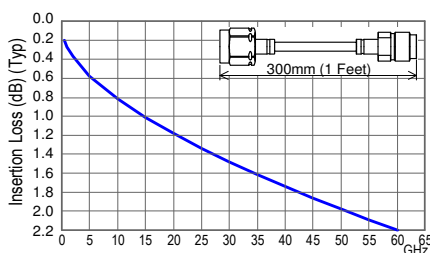


---CAUTION---
When you install the cable assembly, please support the section of the cable close to the connector with your fingers before tightening the nut.
This cable is composed of a thin copper tube and could be easily damaged by applying a twist stress.



Fig.2 Tightening the Nut

Reference for
Minimum Cable Installation Space
by Rounded Re-Forming




Hand Bender 2200
for Re-Forming (R3.2/7 mm)

CAUTION:

*Bending of the Cable Using
Hand Bender 2200*

In order to prevent any damage in the joint part of the cable and the connector, please bend the cable about 4 mm away from the joint part.

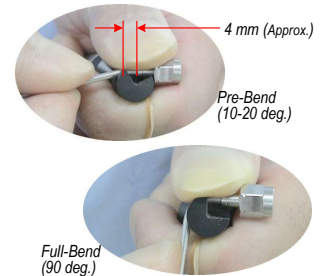


RoHS Compliant

REACH Compliant


NOTE: All dimensions are in millimeters.

Connector Interface Mating Dimensions


KPC185 (1.85 mm Connectors)

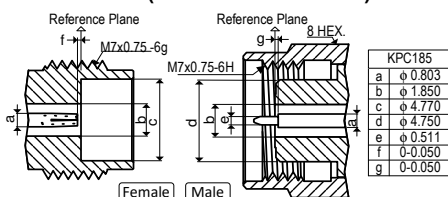

KPC240 (2.4 mm Connectors)

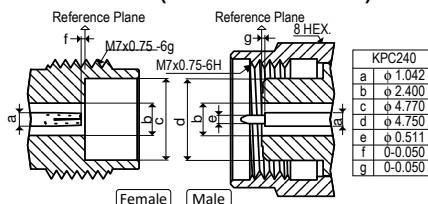

KPC292 (2.92 mm Connectors)

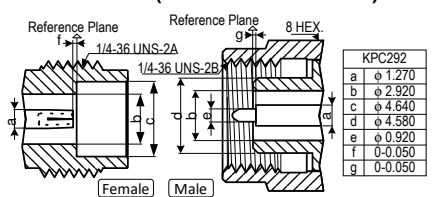

Specifications Subject to Change Without Notice

Rev. 04 Oct. 2019

Copyright(C) 2002-2021 Kawashima Manufacturing Co., Ltd. <All rights reserved.>



Kawashima Manufacturing Co., Ltd.

1-3-5 Higashi-ikuta, Tama-ku,
Kawasaki 214-0031 JAPAN

TEL: +81-44-911-7073
https://kmco.co.jp/en/

FAX: +81-44-911-9621
e-mail: sales@kmco.co.jp

Re-Formable Semirigid Cable Assemblies, Between Connector Interface 1 mm and 1.85 mm for DC - 67 GHz

DESCRIPTION

"CA185F100F, CA185F100M, CA185M100F, and CA185M100M" re-formable semirigid cable assemblies, Between, are up to 67 GHz and **easy to install with bending by hand** at your lab/site. They are designed for broadband measurement, instrument, and system applications.

All materials are **"lead free"**.


SPECIFICATIONS

Electrical:

See below table.

CABLE PROPERTIES

Outer Conductor	1.19 mm Diameter Copper with Cu/Sn/Zn Plated
Center Conductor	Silver Plated Copper
Insulator	PTFE
Moding Frequency	112 GHz (Approx.)
Delay Time	0.476 ns/100 mm
Inside Bending Radius	3 mm (min)
"Non-Magnetic"	

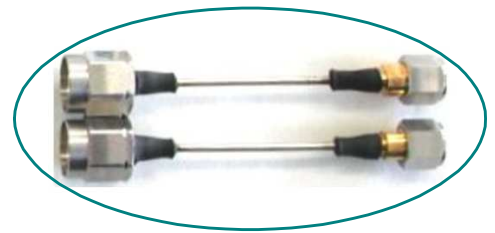

Production Status
2 Weeks Lead-Time
for Shipping

[*] Please specify length (L: □□□□ see following table) when you order this item.

For example: CA185M100M0035 (Length: 35 mm)

TYPE	Connector Interface	Frequency Range	Return Loss	Insertion Loss	Temperature Range	Length (L)
CA185F100F □□□□ Female/Female	1.85 mm / 1 mm	DC-67 GHz	> 15 dB	See Fig. 1	-55 to +100 °C	35 to 300 mm +/- 2 mm [*] (Over 300 mm: Negotiable)
CA185F100M □□□□ Female/Male						
CA185M100F □□□□ Male/Female						
CA185M100M □□□□ Male/Male						

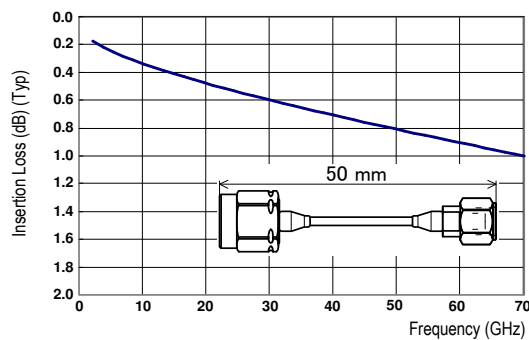


Fig.1 Estimated Insertion Loss, Including Adaptor


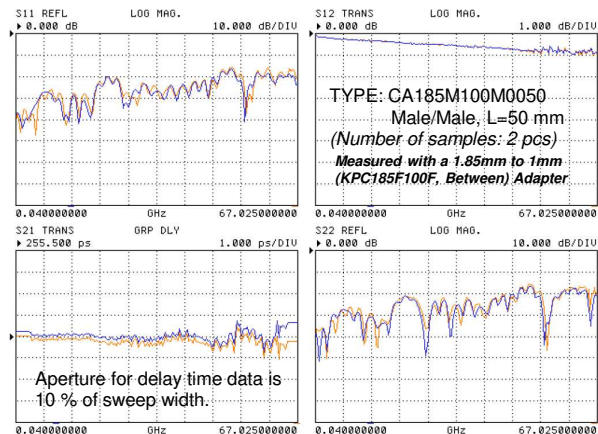


Fig.2 Typical Performance

NOTE: All dimensions are in millimeters.


Connector Interface Mating Dimensions

KPC100 (1 mm Connectors)

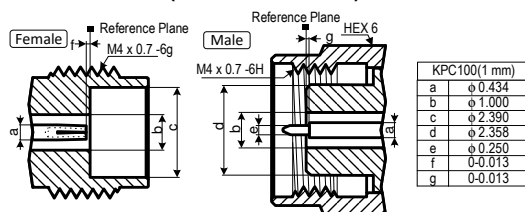

KPC100(1 mm)	
a	φ 0.434
b	φ 1.000
c	φ 2.390
d	φ 2.358
e	φ 0.250
f	0-0.013
g	0-0.013

KPC185 (1.85 mm Connectors <*>)

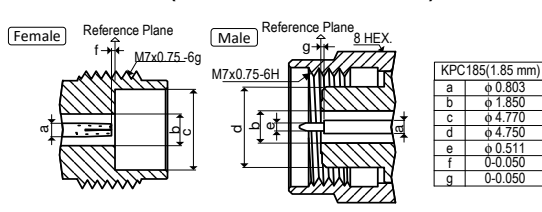

KPC185(1.85 mm)	
a	φ 0.803
b	φ 1.850
c	φ 4.770
d	φ 4.750
e	φ 0.511
f	0-0.050
g	0-0.050

<*> Matable with 2.4 mm connectors

RoHS Compliant

REACH Compliant

Specifications Subject to Change Without Notice

Copyright(C) 2002-2021 Kawashima Manufacturing Co., Ltd. <All rights reserved.>

Rev. 03 June 2017

Re-Formable Semirigid Cable Assemblies, Between Connector Interface 2.4 mm/1.85 mm for DC - 50 GHz and 2.92 mm/1.85 mm, 2.92 mm/2.4 mm for DC - 40 GHz

DESCRIPTION

The Re-Formable Semirigid Cable Assemblies, Between, are up to 40 and 50 GHz, and easy to install with bending by hand at your lab/site.

They are designed for broadband measurement, instrument, and system applications.

All materials are "lead free".

SPECIFICATIONS

Electrical:

See below table.

CABLE PROPERTIES













Outer Conductor	2.2 mm Diameter Copper with Cu/Sn/Zn Plated
Center Conductor	Silver Plated Copper
Insulator	Solid PTFE
Moding Frequency	61 GHz (Approx.)
Delay Time	0.476 ns/100 mm
Inside Bending Radius	3.2 mm (min)
"Non-Magnetic"	



Production Status
2 Weeks Lead-Time for Shipping

[*] Please specify length (L: □□□□ see following table) when you order this item.

For example: CA240F185M0035 (Length: 35 mm)

TYPE	Connector Interface	Frequency Range	Return Loss	Insertion Loss	Temperature Range	Length (L)
CA240F185F  Female/Female	2.4 mm/ 1.85 mm	DC-50 GHz	> 18 dB	See Fig. 1	-55 to +100 °C	35 to 300 mm +/-2 mm [*] (5 mm step): Standard (Over 300 mm: Negotiable)
CA240F185M  Female/Male						
CA240M185F  Male/Female						
CA240M185M  Male/Male						
CA292F185F  Female/Female	2.92 mm/ 1.85 mm	DC-40 GHz	> 18 dB	See Fig. 1	-55 to +100 °C	
CA292F185M  Female/Male						
CA292M185F  Male/Female						
CA292M185M  Male/Male						
CA292F240F  Female/Female	2.92 mm /2.4 mm	DC-40 GHz	> 18 dB	See Fig. 1	-55 to +100 °C	
CA292F240M  Female/Male						
CA292M240F  Male/Female						
CA292M240M  Male/Male						

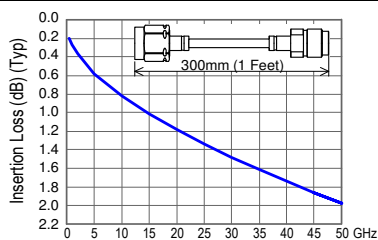



Fig.1 Frequency vs Insertion Loss, L=300mm

---CAUTION---
When you install the cable assembly, please support the section of the cable close to the connector with your fingers before tightening the nut. This cable is composed of a thin copper tube and could be easily damaged by applying a twist stress.



Fig.2 Tightening the Nut

Reference for
Minimum Cable Installation Space
by Rounded Re-Forming




Hand Bender 2200
for Re-Forming (R3.2/7 mm)



CAUTION:
Bending of the Cable Using
Hand Bender 2200

In order to prevent any damage in the joint part of the cable and the connector, please bend the cable about 4 mm away from the joint part.

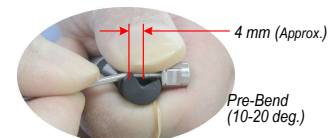


RoHS Compliant


REACH Compliant

Connector Interface Mating


KPC185 (1.85 mm Connectors)

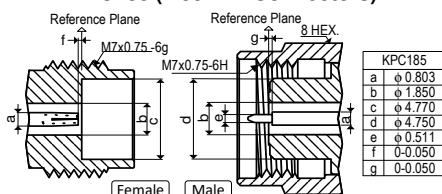

KPC240 (2.4 mm Connectors)

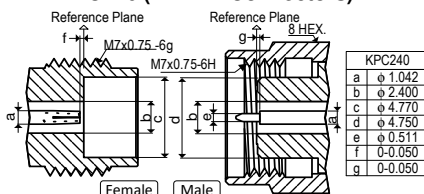

KPC292 (2.92 mm Connectors)

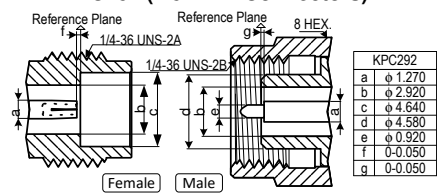

Specifications Subject to Change Without Notice

NOTE: All dimensions are in millimeters.

Rev. 04 Oct. 2019

Copyright(C) 2002-2021 Kawashima Manufacturing Co., Ltd. <All rights reserved.>



Kawashima Manufacturing Co., Ltd.

1-3-5 Higashi-ikuta, Tama-ku,
Kawasaki 214-0031 JAPAN

TEL: +81-44-911-7073
https://kmco.co.jp/en/

FAX: +81-44-911-9621
e-mail: sales@kmco.co.jp

Re-Formable Semirigid Cable Assemblies, Between Connectors: 1.85 mm, 2.4 mm, 2.92 mm, and SMPM

DESCRIPTION

The Re-Formable Semirigid Cable Assemblies, Between, are up to 65 GHz and easy to install with bending by hand at your lab/site.

They are designed for broadband measurement, instrument, and system applications.

All materials are "lead free".

*SMPM: conforms to MIL-STD-348B 328.1

SPECIFICATIONS

Electrical:

See below table.

CABLE PROPERTIES







Outer Conductor	1.19 mm Diameter Copper with Cu/Sn/Zn Plated
Center Conductor	Silver Plated Copper
Insulator	PTFE
Moding Frequency	111 GHz (Approx.)
Delay Time	0.476 ns/100 mm
Inside Bending Radius	3 mm (min)
"Non-Magnetic"	



Production Status
2 Weeks Lead-Time
for Shipping

[*] Please specify length (L: □□□□ see following table) when you order this item.

For example: CA185F119SMPM0025 (Length: 25 mm)

TYPE		Connector Interface	Frequency Range	Return Loss	Insertion Loss	Temperature Range	Length (L)
CA185F119SMPM □□□□ Female/SMPM Female		1.85 mm /SMPM	DC-65 GHz	< 13 GHz: > 22 dB 13-48 GHz: > 16 dB 48-65 GHz: > 12 dB	See Fig. 1	-55 to +100 °C	25 to 300 mm +/-2 mm [*] (Over 300 mm: Negotiable)
CA185M119SMPM □□□□ Male/SMPM Female							
CA240F119SMPM □□□□ Female/SMPM Female		2.4 mm /SMPM	DC-50 GHz	< 13 GHz: > 22 dB 13-38 GHz: > 16 dB 38-50 GHz: > 13 dB			
CA240M119SMPM □□□□ Male/SMPM Female							
CA292F119SMPM □□□□ Female/SMPM Female		2.92 mm /SMPM	DC-40 GHz	< 13 GHz: > 22 dB 13-35 GHz: > 16 dB 35-40 GHz: > 13 dB			
CA292M119SMPM □□□□ Male/SMPM Female							



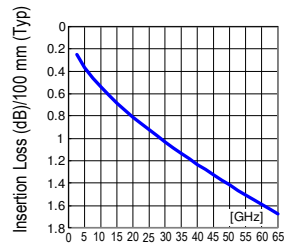


Fig.1 Frequency vs Insertion Loss

---CAUTION---
When you install the cable assembly, please support the section of the cable close to the connector with your fingers before tightening the nut. This cable is composed of a thin copper tube and could be easily damaged by applying a twist stress.



Fig.2 Tightening the Nut

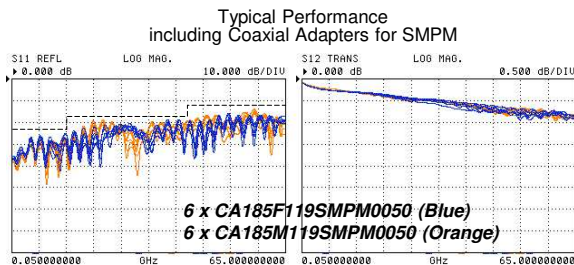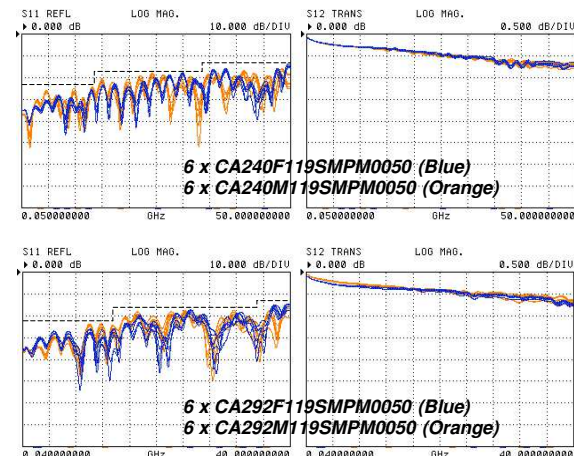

RoHS Compliant

REACH Compliant



Specifications Subject to Change Without Notice

Rev. 04 Jun. 2024

Copyright(C) 2002-2024 Kawashima Manufacturing Co., Ltd. <All rights reserved.>

KMCO
ISO9001:14001 Certified

Kawashima Manufacturing Co., Ltd.

1-3-5 Higashi-ikuta, Tama-ku,
Kawasaki 214-0031 JAPAN

TEL: +81-44-911-7073
https://kmco.co.jp/en/

FAX: +81-44-911-9621
e-mail: sales@kmco.co.jp

Semi-Flexible Cable Assemblies, In-Series

Connector Interface 1 mm for DC - 110 GHz

DESCRIPTION

"SFCA100FF, MF, and MM" semi-flexible cable assemblies are up to 110 GHz and **easy to install in a narrow space with hand form** at your lab/site. They are designed for broadband measurement, instrument, and system use. All materials are **"lead free"**.


SPECIFICATIONS

Electrical:

See below table.

CABLE PROPERTIES

Outer Conductor	1.19 mm Diameter Tin-Soaked Copper Wire Braid
Center Conductor	Silver Plated Copper
Insulator	Solid PTFE
Moding Frequency	112 GHz (Approx.)
Delay Time	0.476 ns/100 mm
Inside Bending Radius	2 mm (min)
"Non-Magnetic"	

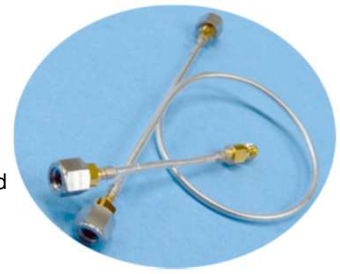

Production Status
TBD

[*] Please specify length (L: □□□□ see following table) when you order this item.

For example: SFCA100MM0050 (Length: 50 mm)

TYPE	Connector Interface	Frequency Range	Return Loss	Insertion Loss	Temperature Range	Length (L)
SFCA100FF □□□□ Female/Female	1 mm	DC-110 GHz	> 15 dB	See Fig. 1	-30 to +100 °C	30 to 150 mm +/-1 mm [*] (Over 150 mm: Negotiable)
SFCA100MF □□□□ Male/Female						
SFCA100MM □□□□ Male/Male						

(*) Jacket (UL certified heat shrink tube) for cable braid protection




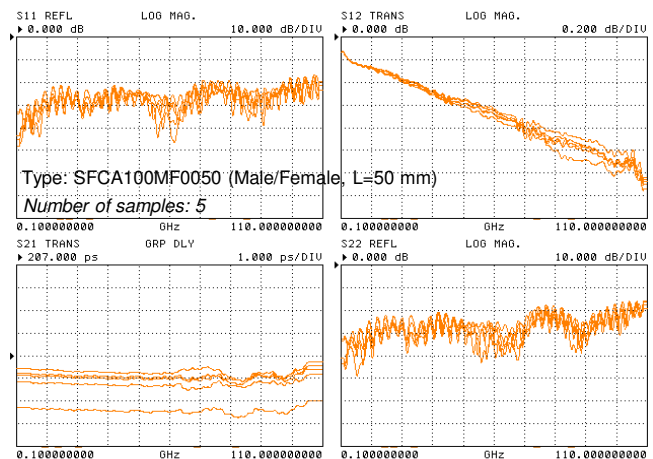


Fig.2 Typical Performance

Hold Wrench #3555

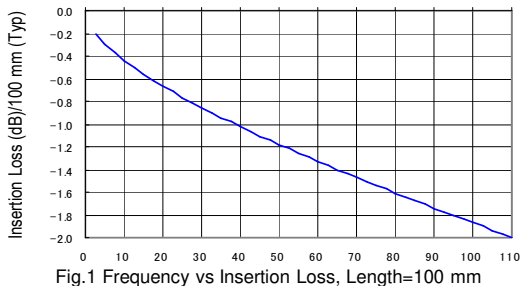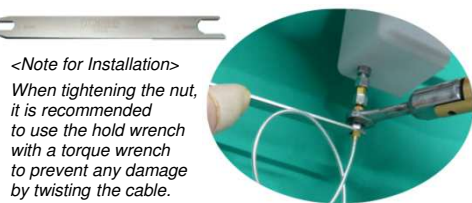

Interface Mating Dimensions of KPC100 (1 mm Connectors)

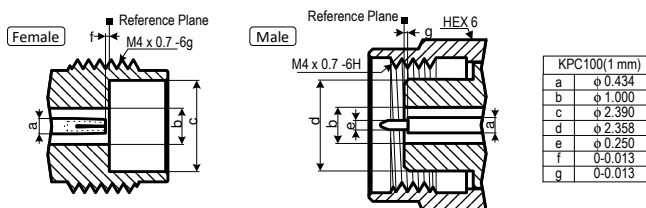

RoHS Compliant

REACH Compliant

NOTE: All dimensions are in millimeters.

Specifications Subject to Change Without Notice

Rev. 04 Oct 2019

Copyright(C) 2002-2021 Kawashima Manufacturing Co., Ltd. <All rights reserved.>

KMCO
ISO9001:14001 Certified

Kawashima Manufacturing Co., Ltd.

1-3-5 Higashi-ikuta, Tama-ku,
Kawasaki 214-0031 JAPAN

TEL: +81-44-911-7073
https://kmco.co.jp/en/

FAX: +81-44-911-9621
e-mail: sales@kmco.co.jp

Preliminary

Semi-Flexible Cable Assemblies

1.85 mm/SMPM for DC - 65 GHz, 2.92 mm/SMPM for DC - 40 GHz

DESCRIPTION

The Semi-Flexible Cable Assemblies are up to 40 and 65 GHz, and **easy to install** at your lab/site.

They are designed for broadband measurement, instrument, and system use.

All materials are **"lead free"**.

*SMPM: conforms to MIL-STD-348B

NOTICE 5 328.1. SMPM female interface


SPECIFICATIONS

Electrical:

See below table.

CABLE PROPERTIES

Outer Conductor	1.19 mm Diameter Tin-Soaked Copper Wire Braid
Center Conductor	Silver Plated Copper
Insulator	Solid PTFE
Moding Frequency	112 GHz (Approx.)
Delay Time	0.476 ns/100 mm
Inside Bending Radius	2 mm (min)
"Non-Magnetic"	

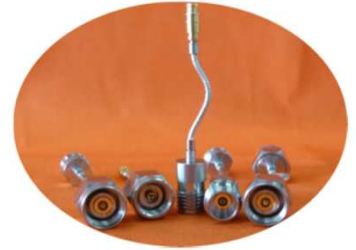

Production Status
2 Weeks Lead-Time
for Shipping

[**] Please specify length (L: □□□□ see following table) when you order this item.

For example: SFCA185MM0035 (Length: 35 mm)

SFCA185MM0035J (Length: 35 mm, with Jacket)

TYPE	Connector Interface	Frequency Range	Return Loss	Insertion Loss	Temperature Range	Length (L)	With Jacket
SFCA185119FF □□□□ Female/Female	1.85 mm	DC-65 GHz (Within)	> 17 dB	See Fig. 1	-55 to +100 °C (-30 to +100 °C for Jacket Type)	35 to 150 mm +/-2 mm [**] Standard (Over 150 mm: Negotiable)	Available (UL Certified Heat Shrink Tube)
SFCA185119MF □□□□ Male/Female							
SFCA185119MM □□□□ Male/Male							
SFCA292119FF □□□□ Female/Female	2.92 mm	DC-40 GHz (Within)	> 17 dB	See Fig. 1	-55 to +100 °C (-30 to +100 °C for Jacket Type)	35 to 150 mm +/-2 mm [**] Standard (Over 150 mm: Negotiable)	Available (UL Certified Heat Shrink Tube)
SFCA292119MF □□□□ Male/Female							
SFCA292119MM □□□□ Male/Male							
SFCA292F119185F □□□□ Female/Female	2.92 mm / 1.85 mm	DC-40 GHz (Between)	> 17 dB	See Fig. 1	-55 to +100 °C (-30 to +100 °C for Jacket Type)	35 to 150 mm +/-2 mm [**] Standard (Over 150 mm: Negotiable)	Available (UL Certified Heat Shrink Tube)
SFCA292M119185F □□□□ Male/Female							
SFCA292F119185M □□□□ Female/Male							
SFCA292M119185M □□□□ Male/Male	1.85 mm / SMPM [1]	DC-65 GHz (Between)	< 13 GHz: > 22 dB 13-48 GHz: > 16 dB 48-65 GHz: > 12 dB	See Fig. 1	-55 to +100 °C (-30 to +100 °C for Jacket Type)	35 to 150 mm +/-2 mm [**] Standard (Over 150 mm: Negotiable)	Available (UL Certified Heat Shrink Tube)
SFCA185F119SMPM □□□□ Female/Female							
SFCA185M119SMPM □□□□ Male/Female							
SFCA292F119SMPM □□□□ Female/Female	2.92 mm / SMPM [1]	DC-40 GHz (Between)	> 16 dB	See Fig. 1	-55 to +100 °C (-30 to +100 °C for Jacket Type)	35 to 150 mm +/-2 mm [**] Standard (Over 150 mm: Negotiable)	Available (UL Certified Heat Shrink Tube)
SFCA292M119SMPM □□□□ Male/Female							


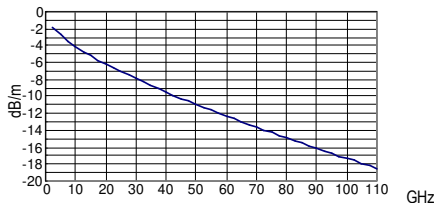


Fig.1 Frequency vs Insertion Loss, L=1000 mm



Removal Tool for SMPM

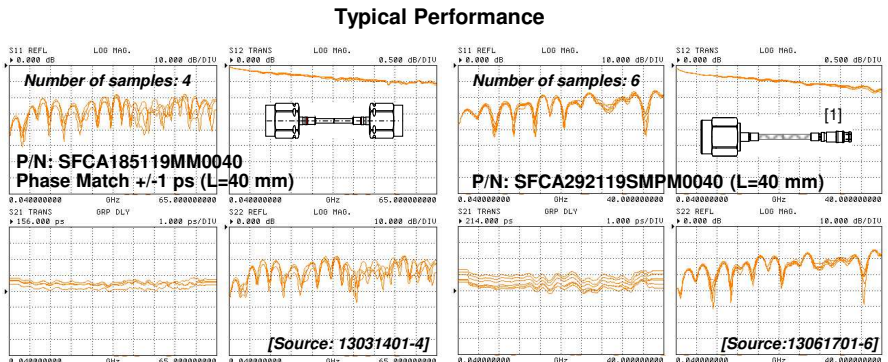

Note [1]:
The measured values of insertion and return loss are included in the performance of the SMPM to 1.85 mm (or 2.92 mm) adaptor.

NOTE: All dimensions are in millimeters.

RoHS Compliant

REACH Compliant

Specifications Subject to Change Without Notice

Copyright(C) 2002-2024 Kawashima Manufacturing Co., Ltd. <All rights reserved.>

Rev. 05 Jun. 2024



Kawashima Manufacturing Co., Ltd.

1-3-5 Higashi-ikuta, Tama-ku,
Kawasaki 214-0031 JAPAN

TEL: +81-44-911-7073
https://kmco.co.jp/en/

FAX: +81-44-911-9621
e-mail: sales@kmco.co.jp